

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:


None

No record of subsequent monumentation found in UNION COUNTY survey records.

DESCRIPTION OF CORNER EVIDENCE FOUND:

None

See Survey Number 023-1997.

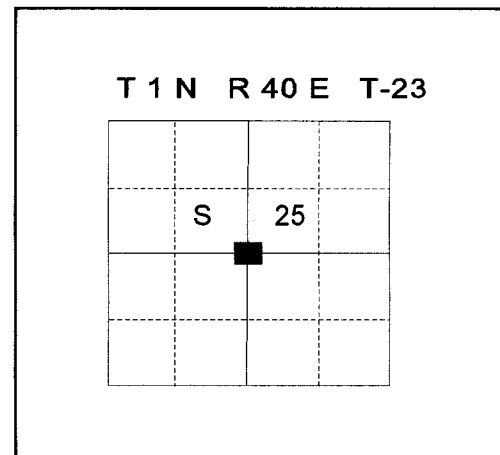

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At position determined by survey, I set a 2 1/2" x 30" aluminum pipe with 2 1/2" aluminum cap marked as shown below, 24" in the ground, with mound of stone 3' at the base, from which:

BEARING TREES:

A 17" Tamarack bears S 4° E, 83.0 feet, marked C1/4 S25 BT.

A 15" Ponderosa Pine bears S 81° W, 58.3 feet, marked C1/4 X BT.

A 16" Ponderosa Pine bears N 23° W, 17.6 feet, marked C1/4 S25 BT.

A 14" Ponderosa Pine bears N 51° E, 50.9 feet, marked S25 BT.

I hereby certify that the corner was monumented on July 24, 1997.

Witnesses: Jeff Madsen and Greg Blackman Jr.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Jeffery P. Petersen

OREGON
JULY 20, 1993

JEFFERY P. PETERSEN
2625

Renewal Date: December 31, 1998

BAGETT - GRIFFITH & BLACKMAN

T1N R40E

C 1/4
S25

1997

OPLS 2625

**UNION COUNTY
SURVEYOR**

Date Received 8-6-97

Date Filed 8-6-97

Filed By L. Robinson, Nancy

File Number 011-1997 R

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 18° East declination, the distances are to a 50d spike driven in the right side of the root crown. I attached a brass washer marked OPLS 2625 to the bearing tree blaze.