

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


History of original corner establishment:

Corner established by Odell and Gray in 1867 under GLO contract number 120, dated February 7, 1868.

Record states:


Set cor for sec's 27, 28, 33, & 34. drove charred stake and dug pits, and raised mound as per instructions.

Township 1 North, Range 40 East
V-13

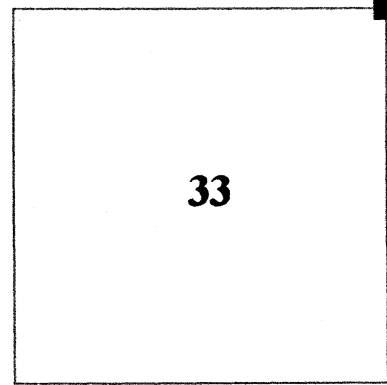

Subsequent survey:

None found



Description of evidence found:

None Found.

Description of monument and accessories established to perpetuate the location of this corner.

Corner positioned by double proportion as per survey 023-2023, set an aluminum pipe, 2 1/2 ins. diam., firmly set, flush with the ground, with 3 1/4 ins. aluminum cap mkd. as shown.

New Accessories:


- An iron rod, 5/8 ins. diam., by 30 ins. long, with aluminum cap, 2 ins. diam. marked RM 1, bears N. 45° E., 10 ft. dist.
- An iron rod, 5/8 ins. diam., by 30 ins. long, with aluminum cap, 2 ins. diam. marked RM 2, bears S. 50° E., 10 ft. dist.
- An iron rod, 5/8 ins. diam., by 30 ins. long, with aluminum cap, 2 ins. diam. marked RM 3, bears S. 45°W., 10 ft. dist.
- An iron rod, 5/8 ins. diam., by 30 ins. long, with aluminum cap, 2 ins. diam. marked RM 4, bears N. 50°W., 10 ft. dist.

Bearings are made with a hand compass, magnetic declination = 15°E.

I hereby certify that the above corner point was perpetuated as herein described on 8/29/2023.


Witnessed by:
Matt Brockamp, LS
Austin Brockamp


REGISTERED
PROFESSIONAL
LAND SURVEYOR



OREGON
MAY 20, 2015
MATTHEW R. BROCKAMP
78556

Registration expires 12/31/2023

UNION COUNTY SURVEYOR	
Date Received	9/18/23
Date Filed	9/18/23
Filed By	
File Number	054-2025R



BROCKAMP LAND SURVEYING, LLC
www.brockamplandsurveying.com
Matt Brockamp, PLS
541-398-0384
matt@brockamplandsurveying.com
P.O. Box 553
Wallowa, OR 97885
Full Service Land Survey Firm