


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner originally established by William H. Odell deputy surveyor under joint contract with Joseph G. Gray, contract no. 120 dated May 27, 1867.

Surveyor's record states: Drove charred stake and raised stone mound as per instructions.

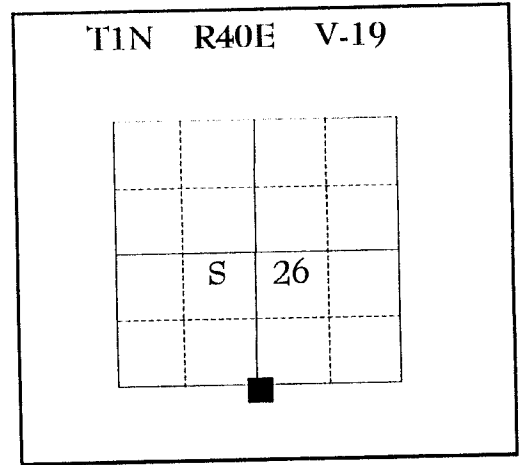

No record of subsequent monumentation found in Union County survey records
DESCRIPTION OF CORNER EVIDENCE FOUND:

Found ancient mound of medium size stones.


See survey 017-1995

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At the found mound of stones I set a 2 1/2" x 30" aluminum pipe monument with 2 1/2" cap marked as shown below was set 24" in the ground with a mound of stone 3 feet at the base raised around the pipe.

NEW BEARING TREES:

- A 32" Ponderosa Pine bears N30E, 53.58 feet, marked 1/4 S26 BT.
- A 9" Ponderosa Pine bears S81E, 118.75 feet, marked X BT.
- A 23" Ponderosa Pine bears S58W, 46.74 feet, marked 1/4 S35 BT.
- A 26" Ponderosa Pine bears N21W, 111.92 feet, marked X BT.

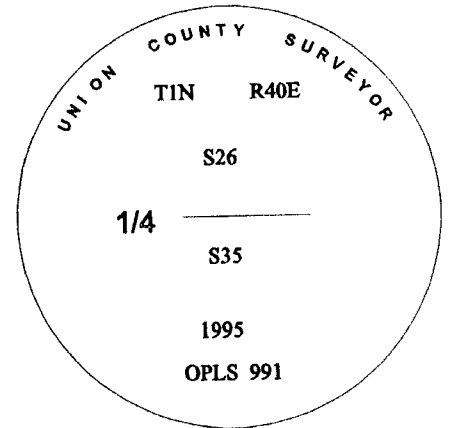

I hereby certify that the above corner point was perpetuated as hereon described on May 22, 1995.

Witness: Jeff Petersen, Peter Crabtree

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 18° East declination, the distances are to a 50d spike driven in the right side of the root crown. I attached a brass washer marked OPLS 991 to the bearing tree blaze.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
JULY 19, 1973
GREGORY T. BLACKMAN
991

Renewal Date: December, 31 1995

**UNION COUNTY
SURVEYOR**

Date Received 6-1-95

Date Filed 6-1-95

Filed By J. Petersen, Deputy

File Number 009-1995 R