

UNION COUNTY SURVEYOR

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner originally established by William H. Odell under GLO contract Number 120, dated May 27, 1867. Surveyor General record states:

Set 1/4 Sec post Cor drove charred stake and raised stone mound as per instructions.

No record of subsequent monumentation found in Union County survey records.

DESCRIPTION OF CORNER EVIDENCE FOUND:

Found mound of stone.

See Survey #028-1999


DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED

TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At mound of stone I set a 2½" x 30" aluminum pipe with aluminum cap marked as shown below, 14" in the ground with a mound of stone 3 feet from base to top of cap from which:

- A 5/8" x 30" rebar with aluminum cap bears N55°E, a distance of 9.21 feet, marked "BGB SURVEY MARKER NE RP".
- A 5/8" x 30" rebar with aluminum cap bears S27°E, a distance of 6.15 feet, marked "BGB SURVEY MARKER SE RP".
- A 5/8" x 30" rebar with aluminum cap bears S48°W, a distance of 7.60 feet, marked "BGB SURVEY MARKER SW RP".
- A 5/8" x 30" rebar with aluminum cap bears N21°W, a distance of 8.38 feet, marked "BGB SURVEY MARKER NW RP".

T 1 N R 40 E X - 17

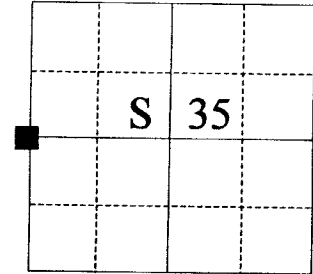

I hereby certify that the corner was monumented on July 21, 1999.


Witness: Norbert W. Volny, Gregory T. Blackman Jr.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Rick G. Robinson

OREGON
July 17, 1986
RICK G. ROBINSON
2219

Renewal Date December 31, 1998

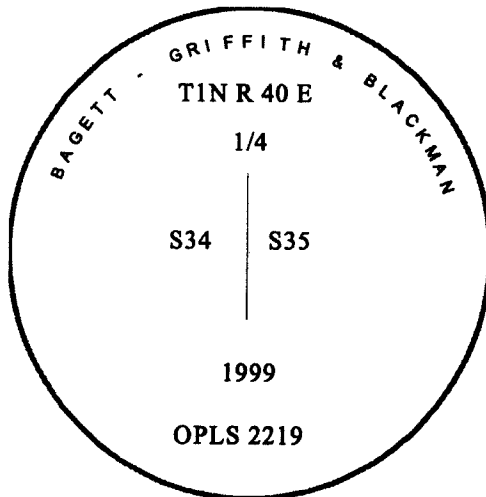

**UNION COUNTY
SURVEYOR**

Date Received 7/25/99

Date Filed 7/27/99

Filed By *Gregory T. Blackman*

File Number 020-1999R

I used a total station with the same basis of bearings as Survey #028-1999 in the establishment of the new accessories. The distances are to the center of the aluminum cap.