

UNION COUNTY SURVEYOR

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:
NONE

No record of subsequent monumentation found in Union County survey records.

DESCRIPTION OF CORNER EVIDENCE FOUND:


NONE

See Survey #028-1999

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED
TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At position determined by survey, I set a 5/8" x 30" rebar with 1 1/2" aluminum cap marked as shown below, 30" in the ground from which:

T 1 N R 40 E Y-20



A 16" Douglas Fir bears S10°W, a distance of 55.26 feet, marked SE 1/16 S35 BT.

A 10" Ponderosa Pine bears N13°W, a distance of 52.28 feet, marked SE 1/16 S35 BT.


I hereby certify that the corner was monumented on July 21, 1999.
Witness: Norbert W. Volny, Gregory T. Blackman Jr.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Rick G. Robinson

OREGON
July 17, 1986
RICK G. ROBINSON
2219

Renewal Date December 31, 1998

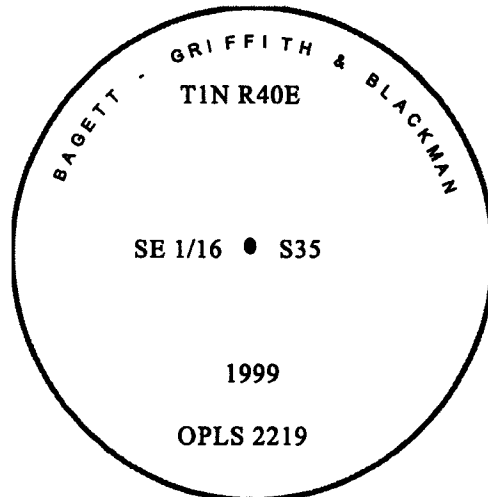

**UNION COUNTY
SURVEYOR**

Date Received 7/26/99

Date Filed 8/1/99

Filed By *Gregory T. Blackman*

File Number 024-1999R

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 18° East declination, the distances are to a 50d spike driven in the right side of the root crown. I attached a brass washer marked OPLS 2219 to the bearing tree blaze.