


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Z-13

History of original corner establishment:

Corner established in 1863 by Timothy W. Davenport, Deputy Surveyor under Contract No. 102.

Surveyor General's records states:
Set post, cor. to secs. 33 and 34. Made mound of rock.

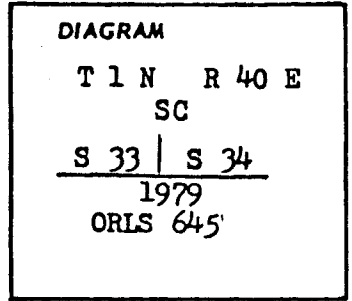

Description of corner evidence found:

At assumed corner location I found mound of stone; also a fence corner confirmed corner location along base line. While digging to set monument, I found an old hub and tack where some one prior has determined this to be the sec. cor.

Description of monument and accessories I established to perpetuate the original location of this corner

I set a 2" galv. iron pipe with brass cap approx. 8" above surface of ground in a mound of stone 4 ft. dia. and 1 1/2 ft. high. Cap stamped as shown above.

No bearing trees available.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
JULY 10, 1984
JAMES H. HAMBLETON
645

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office
for record on the day of

..... by
(COUNTY OFFICIAL) (DEPUTY)

UNION COUNTY SURVEYOR	
Date Received	_____
Date Filed	_____
☆ GPO 796-333	
By	_____
File No.	99-84R