

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Z-21

History of original corner establishment:


Corner established in 1863 by Timothy W. Davenport, Deputy Surveyor under Contract No. 102.

Surveyor General's records states:
Set post, cor. to secs. 35 and 36; from which

A 8" tamarack bears N 15 E, 31 lks.

A 7" tamarack bears N 10 W, 35 lks.

A 7" pine bears S 10 W, 43 lks.

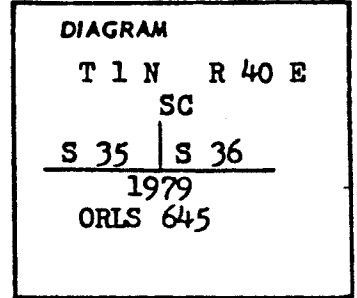

Description of corner evidence found:

At assumed corner location I found no trace of wooden post.

Found a stump hole and part of 9" tamarack tree; badly deteriorated. No evidence of scribing. Bears N 10 W, 35 lks.

Found a 18" pine stump and butt cut with face grown over and being on the NW side of tree BT scribed in face. Bears S 10 E, 43 lks. Note: Bearing in notes says S 10 W instead of S 10 E.

No trace of BT in Sec. 36.

Description of monument and accessories I established to perpetuate the original location of this corner

I set a 2" galv. iron pipe with brass cap approx. 4" above surface of ground using the pine stump in sec. 1, the stump hole in sec. 35 and the distance from the closing corner of sec. 1 & 2 to confirm the position from the existing bearing tree and to determine that the bearing should have read S 10 E instead of S 10 W. Cap stamped as shown above.

Bearing trees:

A 14" D. fir bears N 63 W, 27.92 ft. scribed T 1 N R 40 E S 35 BT.

A 10" D. fir bears N 51 E, 58.0 ft. scribed T 1 N, R 40 E S 36 BT.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

James H. Hambleton

OREGON
JULY 10, 1964
JAMES H. HAMBLETON
645

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office
for record on the day of

..... by
(COUNTY OFFICIAL) (DEPUTY)

UNION COUNTY SURVEYOR	
Date Received	_____
Date Filed	_____
☆ GPO 796-333	
By	_____
File No.	<u>103-84 R</u>