

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


Index File No. Z-23

History of original corner establishment:

Original corner established in 1863 by T. Davenport under contract #102.

At the corner he set a post from which:

- A 30" Pine bears S10°W, 10 lks.
- A 30" Pine bears N40°E, 21 lks.

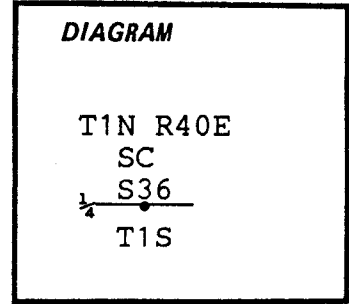

Description of corner evidence found:

No corner monument found.

Orig. BT found:

A 36" Pine stump bears S10°W, 10 lks., blaze&scribing visible: 'B'

Description of monument and accessories | established to perpetuate the original location of this corner:

From evidence, set 2 1/2"x30" aluminum capped aluminum pipe rising 5", no stones available. Set steel fencepost 3 ft. North of corner.

Cap is marked:

SC
T1N R40E
 1/4 S36

New BT's:

- An 1 1/2" Fir bears N49°W, 110.4 ft., blazed&scribed: 1/4 S36 SCBT
- A 12" P. Pine bears N20 1/2°E, 21.3 ft., blazed&scribed: 1/4 S36 SCBT


RLS1848
1986

Painted blazes and attached signs as per Standard Specifications for Cadastral Surveys, USFS Region 6, March 1982. A 1/4" brass disk stamped "RLS 1848" was nailed to the lower end of the blazes.

Where Rd. 6200 begins to climb out of Clark's Creek, a private rd. goes South, at 1/4 mile another private rd turns lt & climbs to ridgetop, at 1/4 mile. Corner is NE'ly from road, 250' in a small clearing.

Compass Declination: 19 1/2°E
Witness: Jeremy Sutton

I hereby certify that the above described corner monument and/or accessories were established as hereon described on July 13, 1986.

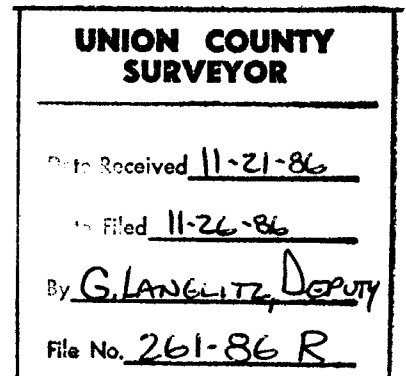

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....
..... by

(COUNTY OFFICIAL) (DEPUTY)