


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

**HISTORY OF ORIGINAL CORNER ESTABLISHMENT:**

None



DIAGRAM

No record of subsequent monumentation found in Union County survey records.

**DESCRIPTION OF CORNER EVIDENCE FOUND:**

See Union County survey 002-1994.

**DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:**

At computed position, I set a 2½" x 30" aluminum pipe with aluminum cap marked as shown below, 28" in the ground, from which;


A 18" Douglas Fir bears N18°E, 41.40 feet, marked "C 1/4 S7 BT".

A 23" Douglas Fir bears S79°E, 29.80 feet, marked "X BT".

A 17" Tamarack bears S44°W, 50.55 feet, marked "C 1/4 S7 BT".

A 18" Tamarack bears N56°W, 62.49 feet, marked "X BT".

Drove steel fence post 5' north.

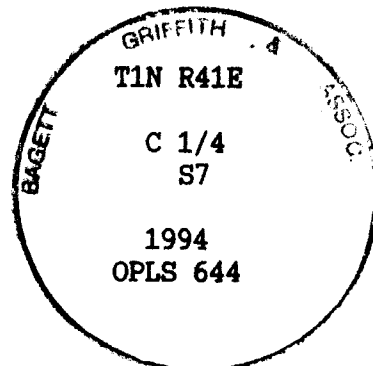

I hereby certify that the above corner point was perpetuated as hereon described on January 24, 1994. Witness: Jeff Petersen, Mike Schlegel.

**UNION COUNTY SURVEYOR**

---

Date Received 2-10-94

Date Filed 3-17-94

By Gregory T. Black

File No. 008-1994 R

REGISTERED PROFESSIONAL LAND SURVEYOR

OREGON  
JULY 10, 1984  
DUANE I. GRIFFITH  
644

I used a steel tape and magnetic compass in the establishment of new accessories. I used 20° East magnetic declination and the distances are to a 60d nail driven into the right side of the root crown.