


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by William H. Odell and Joseph G. Gray under glo joint contract number 120, dated May 27, 1867
Surveyor General record states:

Set 1/4 Sec cor post from which:

- A pine 42 in dia bears N80°E 65 lks
- A pine 30 in dia bears S15°W 64 lks

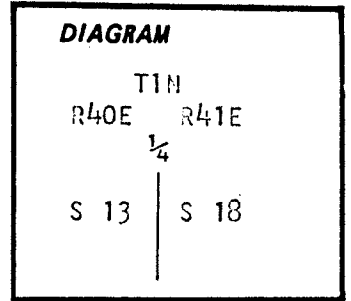

Description of corner evidence found:

- Found 40 inch diameter pine stump N80°E 42.9 feet, scribes visible
- Found 30 inch diameter pine stump S15°W 42.2 feet, no scribes visible

Distances to face of blaze

Description of monument and accessories I established to perpetuate the

original location of this corner: At record bearing and distance from BT stumps, I set a 2 1/2 inch x 30 inch aluminum pipe with aluminum cap marked as shown, 30 inches in the ground from which:

New BTs

- A 13 inch diameter red fir bears S72°E 19.7 feet marked 1/4 S18 BT
- A 14 inch diameter red fir bears S26°W 12.3 feet marked 1/4 S13 BT

Corner set May 8, 1984

Witnesses: Duane Griffith and Rick Robinson

UNION COUNTY SURVEYOR

Date Received 5-29-84

Date Filed 5-31-84


By G. LANGLITZ, DEPUTY

File No. 859-84R

REGISTERED PROFESSIONAL LAND SURVEYOR

Gregory T. Blackman

OREGON
JULY 13, 1973
GREGORY T. BLACKMAN
991

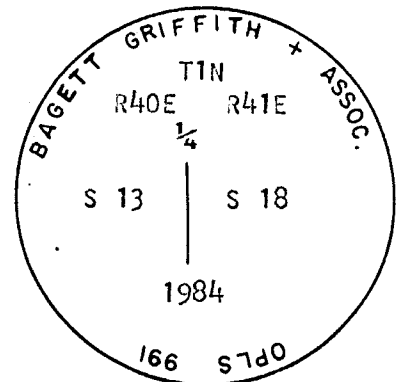

I used a steel tape and magnetic compass in the establishment of accessories. I used 18° East magnetic declination, and distances to the new BTs are to the center of the tree. I placed a brass washer marked OPLS 991 by the BT blaze of new BTs.

See survey number 21-84

Office of..... County of.....

State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

..... by

(COUNTY OFFICIAL)

(DEPUTY)