


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by William H. Odell and Joseph G. Gray under glo joint contract number 120, dated May 27, 1867
Surveyor General record states:

Set 1/4 Sec post cor from which;

- A pine 42 in dia bears S40°W 58 lks
- A larch 20 in dia bears N40°E 54 lks

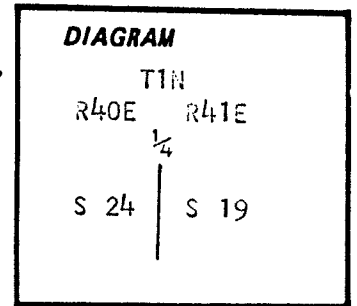

Description of corner evidence found:

- Found 20 inch m/1 tamarack stump N40°E 35.6 feet, no scribes visible
- Found 40 inch m/1 pine stump, burned, S40°W 38.3 feet, no scribes visible

Found tip of the original post at record bearing and distance from stumps

Distance from face of stump

Description of monument and accessories established to perpetuate the

original location of this corner: In place of post, I set a 2 1/2 inch x 30 inch aluminum pipe with aluminum cap marked as shown, 28 inches in the ground, from which;

New BTs

- A 14 inch diameter P.Pine bears S8°E 307.6 feet marked 1/4 S19 BT
- A 16 inch double bole red fir bears N65°W, 378.9 feet marked 1/4 S24 BT (marked South bole)

Raised mound of stone around monument

Corner set May 9, 1984


Witnesses: Duane Griffith and Rick Robinson

UNION COUNTY SURVEYOR
Date Received <u>5-29-84</u>
Date Filed <u>5-31-84</u>
By <u>G. LANGLITZ DEPUTY</u>
File No. <u>857-84R</u>

REGISTERED PROFESSIONAL LAND SURVEYOR

Gregory T. Blackman

OREGON JULY 13, 1973 GREGORY T. BLACKMAN 991

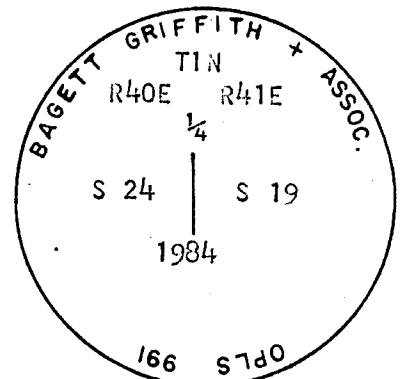

I used a steel tape and magnetic compass in the establishment of accessories. I used 18° East magnetic declination, and distances to the new BTs are to the center of the tree. I placed a brass washer marked OPLS 991 by the BT blaze of new BTs.

See survey number 21-84

Office of..... County of.....
 State of....., I hereby certify that the within instrument was filed in this office
 for record on the..... day of....., 19.....
 by
 (COUNTY OFFICIAL) (DEPUTY)