


UNION COUNTY  
 CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by William H. Odell under GLO Contract Number 120, dated May 27, 1867. Surveyor General record states: Set ¼ corner post

FROM WHICH:

A Pine 10 in. diameter bears N 45° W, 6 lks. dist.  
 A Pine 15 in. diameter bears S 40° E, 10 lks. dist.

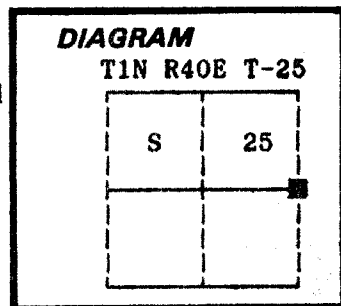

Corner found by survey number 53-75 by James Hambleton, OPLS 645. Map of survey states "found ¼ cor. as per GLO notes".

No record of subsequent monumentation found in Union County survey records.

Description of corner evidence found:

Found a mound of stone with a 40d spike in center. I believe the spike to mark the position used on survey number 53-75.

Found a 14" Ponderosa Pine stump which bears S 11° W, (record S 40° E, 10 lks.) a distance of 7.5 feet, scribes visible.

Found a 20" Ponderosa Pine stump which bears N 20 W, (record N 45° W, 6 lks.) a distance of 4.1 feet, scribes visible.

The GLO record bearing and distance for these bearing trees will not intersect. It appears the position of the spike is intended to represent the mean of the record GLO distances.

In order to preserve the integrity of survey number 53-75, I accept the position of the spike as the true corner location.

Description of monument and accessories I established to perpetuate the

original location of this corner: At the position of the found spike set by survey number 53-75, I set a 2 1/2"x30" Aluminum pipe with aluminum cap marked as shown, 28 inches in the ground, and raised a mound of stone with a 3 foot base for the corner position, from which:

New Bearing Trees:

A 18" diameter Ponderosa Pine bears N 52° E, a distance of 51.01 feet, marked ¼ S30 BT


A 15" diameter Douglas Fir bears S 87° E, a distance of 58.29 feet, marked ¼ S30 BT

A 18" diameter Douglas Fir bears S 51° W, a distance of 23.40 feet, marked ¼ S25 BT

A 12" diameter Ponderosa Pine bears N 20° W, a distance of 44.77 feet, marked ¼ S25 BT

I hereby certify that the above corner point was perpetuated as hereon described on May 1, 1991.

Witnesses: Rick Robinson and Jeff Petersen

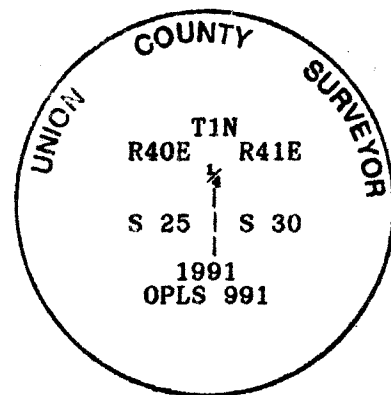

REGISTERED  
 PROFESSIONAL  
 LAND SURVEYOR

*Gregory I. Blackman*  
 OREGON  
JULY 13, 1973  
 GREGORY I. BLACKMAN  
 991

I used a steel tape and magnetic compass in the establishment of new accessories. I used 20° East magnetic declination and the distances are to a 50d spike driven in the right side of the root crown. I attached a brass washer marked OPLS 991 to the BT blaze.

**UNION COUNTY  
 SURVEYOR**

---

Date Received 5-17-91

Date Filed 5-17-91

By R. ROBINSON (DEPUTY)

File No. 007-1991R

01  
 T-25