

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

A-15  
Z-15


History of original corner establishment: Corner established in 1881 by Jacob C. Cooper, unerr. General Land Office Contract No. 397.

Surveyor General records (notes) states:  
Set pine post 4 ft. long 3 ins. thick 2 ft. in ground for 1/4 sec. cor.

Pine 20 in. dia. S 54° E, 159 lks.

Pine 20 in. dia. N 32° W, 113 lks.

note: No restoration appears in the county records.

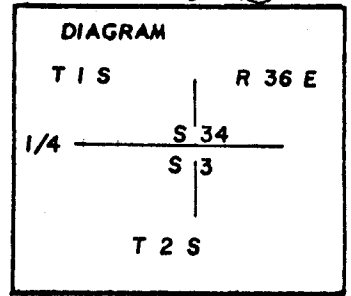

**Description of corner evidence found:**

Found 30 ins. Pond. Pine, Live & in good condition, with scribing visible, bearing S54°E 105.0 ft. dist. from the corner position. Found uprooted pine, bearing approx. N32°W 78 ft. from the corner position, no scribing visible. Established corner position N54°W 105.0 ft. dist. from live 30 ins. Pine.

**Description of monument and accessories I established to perpetuate the original location of this corner**

Set 30"x2 1/2" iron pipe with 3" brass cap marked as shown, 25" in the ground & raised a mound of stone around the pine.


From which a new Bearing Tree.

A Fir 16 ins. diam. bears N3°E, 107.5 ft. dist.

Marked T1S R36E 1/4S34 BT.

Distance taken to a brass washer in the blaze of the new bearing tree.

Set a steel fence post approx. 5 ft. East from corner with forest boundry sign attached.

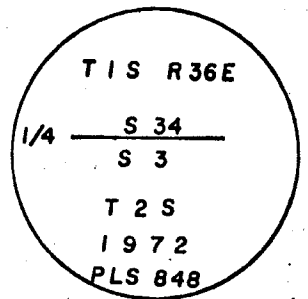

Used a steel tape & magnetic compass with declination equal 20° East.

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

OREGON  
JULY 12, 1968  
DOUGLAS M. FERGUSON  
848

Office of..... County of.....  
State of....., I hereby certify that the within instrument was filed in this office  
for record on the ..... day of ....., 19....., at..... o'clock .....m., (signed)  
..... by .....  
(COUNTY OFFICIAL) (DEPUTY)

Form R6-7100-57 (9/66)

**UNION COUNTY SURVEYOR**

---

Date Received \_\_\_\_\_

Date Filed \_\_\_\_\_

By \_\_\_\_\_

File No. 224-848 R