

USDA-FOREST SERVICE

Index File No. A-251

CORNER RECORD (SEARCH)
(Ref. FSM 7151.4)

Tract or Survey No. _____

Cor. No. _____


T 15 R. 38E

R.D. WALLA WALLA County UMATILLA-UNION COUNTY LINE

Merid. WILL

N.F. UMATILLA State OREGON

CORNER DIAGRAM

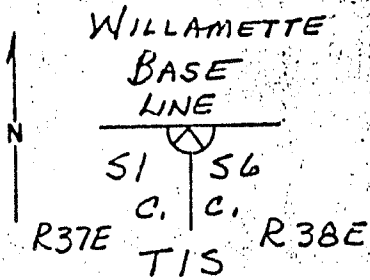

DESCRIBE CORNER MONUMENT FOUND

NONE

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

ORIG. 8" SPRUCE IS A 24" LIVE LODGEPOLE PINE PREVIOUSLY OPENED. FAINT SCRIBES ARE VISIBLE. BEARS N 40° W, 16.5 FT.

ORIG. 8" SPRUCE IS NOW ONLY A DELAYED PIECE OF WOOD WITH SCRIBING, "B T", VISIBLE. BEARS N 60° E, 15.8 FT.

ORIG. 16" SPRUCE IS A 24" SPRUCE WINDFALL WITH FULL SCRIBES VISIBLE ON PARTLY HEALED DOUBLE BLAZES, BEARS S 30° W, 51.5 FT. ORIG. SE BT IS GONE.

PHOTO IDENTIFICATION DATA

Photo No. _____
Filed At. _____
Object Ident. _____
Ident. By _____
Signature

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

CORNER IS 1,100 FT WEST OF SUMMIT RD. 31.

PLACED BT SIGNS ON TREES & K-TAG ON RD 31.

(CORNER IS AT SE TIP OF GLADE)

PLANE COORDINATE POSITION DATA

State _____ Zone _____
X _____
Y _____
Estob. By _____
Agency

<i>Signature</i>	<i>Title</i>	<i>Division</i>	<i>Headquarters</i>	<i>Date</i>	7100-52 (3. 68)
<u>Dennis L. Gaylord</u>		<u>PLS 1636</u>		<u>9/30/81</u>	

UNION COUNTY SURVEYOR

Date Received _____

Date Filed _____

By _____

File No. 31-87R

A-1

Dependent Resurvey of the West Boundary,
T. 1 S., R. 38 E., Willamette Meridian, Oregon

FEET	<p>Over broken slope.</p> <p>5310.48 Point for the cor. of secs. 1, 6, 7, and 12 at proportionate dist., there is no remaining evidence of the original cor., not monumented.</p> <hr/> <p>N. 0° 01' 38" E., bet. secs. 1 and 6.</p> <p>Over broken slope, through fir, tamarack, and pine timber.</p> <p>2655.24 Point for the ¼ sec. cor. of secs. 1 and 6, at proportionate dist., there is no remaining evidence of the original cor., not monumented.</p> <p>Over broken slope.</p> <p>5376.86 The closing cor. of T. 1 S., Rs. 37 and 38 E., determined at record bearing and dist. from the remains of the original NW. bearing tree</p> <p style="margin-left: 40px;">A root hole, bears S. 30° W., 58.9 ft. dist., with uprooted, partially decayed spruce trunk, 20 ins. diam., alongside, with fragmentary scribe marks visible on partially decayed open double blazes. (Record, 51.5 ft.)</p> <p style="margin-left: 40px;">A partially decayed lodgepole pine snag, 25 ins. diam., bears N. 40° W., 16.5 ft. dist., with fragmentary scribe marks visible on opened double blazes. (Record, spruce)</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground, in a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <p>T 1 N R 38 E</p> <p>S 31</p> <hr style="width: 10%; margin: auto;"/> <table style="margin: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 1</td> <td style="padding: 0 5px;">S 6</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">R 37 E</td> <td style="padding: 0 5px;">R 38 E</td> </tr> </table> <p>T 1 S</p> <p>CC</p> <p>2003</p> </div> <p>from which new bearing trees</p> <p style="margin-left: 40px;">A tamarack, 22 ins. diam., bears S. 31¼° E., 85.0 ft. dist., mkd. T1S R38E S6 CC BT.</p>	S 1	S 6	R 37 E	R 38 E
S 1	S 6				
R 37 E	R 38 E				

A-1

UNION COUNTY SURVEYOR	
Date Received	6/12/11
Date Filed	6/23/11
By	R. ROBINSON, Deputy
File No.	024-2011R

Dependent Resurvey of the West Boundary,
T. 1 S., R. 38 E., Willamette Meridian, Oregon

FEET

A fir, 9 ins. diam., bears S. 44° W., 19.5 ft. dist., mkd. T1S R37E S1 CC BT.

A lodgepole pine, 12 ins. diam., bears N. 14¼° W., 33.4 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 1 S., R. 38 E., Willamette Meridian, Oregon

(Restoring the survey by David P. Thompson in 1883
and Frank W. Campbell, in 1883)

From the cor. of secs. 4, 5, 32, and 33, on the S. bdy. of the Tp., reestablished at proportionate measurement by William L. Hanley, Registered Professional Land Surveyor No. 1639, in 1983, recorded in the Union County survey records, survey file No. 12-83. This position was verified and used during an amended survey by Duane I. Griffith, Registered Professional Land Surveyor No. 644, in 1990, recorded in the Union County survey records, survey file No. 1-90 (this survey amended his previous survey in 1978, recorded in the Union county survey records, survey file No. 73-78). There is no remaining evidence of the original cor.; therefore this position is accepted as the cor., monumented with an aluminum post, 2 ins. diam., firmly set, projecting 5 ins. above a collar of stone, with aluminum cap mkd.

T 1 S	R 38 E
S 32	S 33
S 5	S 4
T 2 S	
1983	
ORLS 1639	

from which bearing trees mkd. by Griffith in 1978

A pine, 28 ins. diam., bears S. 83° W., 97.6 ft. dist., with scribe marks T2S R38E S5 BT visible on partially healed double blazes.

A-1

UNION COUNTY SURVEYOR	
Date Received	6/12/11
Date Filed	6/23/11
By	R. ROBINSON, Deputy
File No.	024-2011R