

# CHESEBRO & KALB

Land Surveying &  
Boundary Consulting

P.O. Box 19  
Mill City, OR 97360  
(503) 897-2722

## CERTIFIED RECORD OF LAND CORNER MONUMENTATION

### History of original corner establishment:

**Frank W. Campbell, 1883, Contract No. 468**

Set a basalt stone 18 x 12 x 6 ins. 12 ins. in the ground, marked CC with 5 notches on E & 1 notch on W edges, from which:

A mahogany 4 inch in dia. bears S 50° E 57 lks. (37.6 ft.) dist. marked T1S R38E S5 BT

A mahogany 5 inch in dia. bears S 15° W 56 lks. (37.0 ft.) dist. marked T1S R38E S6 BT

No other tree within limits and

Raised a mound of stone alongside

**Gerald J. Tucker, Forest Ranger, April 29, 1929**

*Found:* Corner is a pile of rocks

A 6" M. Mahogany bears S 10° W 40 lks. (26.4 ft.) marked T1S R38E S6, added location poster

On Pot Camp Ridge just below the lower saddle and about 100 yards south of summit of ridge.

Lines up with baseline fences in Grand "Ronde" Valley.

### Description of corner evidence found:

*Monument Found:*

Found no evidence of a stone or mound.

*Accessories Found:*

No trace was found of the original southeast BT.

A mountain mahogany, 7 ins. in diam., bears S 15° W 37.0 ft., with a long partially healed face. The face is worn and scribing is no longer visible. Nailed into the tree is an old USFS location tag with 4-29-29 clearly visible. Tucker's field notes indicated that he had seen scribing in 1929.

### Description of monument and accessories I established to perpetuate the original location of this corner:

*Monuments Set:*

At the record bearing and distance from the southwest BT I set a 2" aluminum cap on a 5/8" x 24" rebar for the original corner location. I set no accessories for the original location.

At the intersection with the standard parallel I set a 3 1/4" aluminum cap, marked as shown, on a 2 1/2" x 30" aluminum pipe (standard U.S.F.S. aluminum monument) 10 ins. in the ground to bedrock with rock mound 3 ft. base & 2 1/2 ft. high.

*Accessories Set for the monument on the standard parallel:*

A 2" aluminum cap, marked as shown, on a 5/8" x 24" rebar bears S 86° E 14.14 ft., with 4 in. showing above the ground.

A 2" aluminum cap, marked as shown, on a 5/8" x 24" rebar bears S 68° W 10.86 ft., with 8 in. showing above the ground in a 1 1/2' x 1' stone mound.

The amended closing corner bears S 0°33'52" W 14.27 ft.

The standard corner for Sections 31 & 32 bears S 89° 40'21" W 314.11 ft.

Red paint, posts and signs added as needed.

*NAD 83 (CORS 2002) Coordinates for monument on standard parallel:*


|                       |                          |
|-----------------------|--------------------------|
| Geographic            | State Plane (North Zone) |
| 45°30'52.7296" N      | N 208,145.041 Meters     |
| 118°05'47.6247" W     | E 2,687,755.153 Meters   |
| Convergence 1° 42'16" |                          |

*Equipment:* Staff compass with tripod, Var. 18° E, Nikon Total Station, loggers tape, clinometer

*Date:* August 15, 2003

*Crew:* Evelyn Kalb, Richard Chesebro

See also the Record of Survey filed concurrently with this certification.

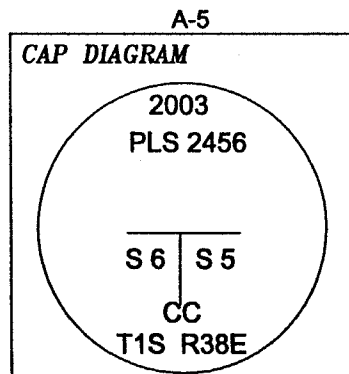

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Evelyn R. Kalb 7/19/04*

OREGON  
July 25, 1990  
Evelyn R. Kalb  
2456

EXPIRES: 06/30/2005

UNION COUNTY  
SURVEYOR

Date Received 2/3/04

Date Filed 2/25/04

Filed By R. Robinson, Deputy

File Number 002-2004R