

History of original corner establishment:

David P. Thompson, Sept 1863, Contract No. 103

Set post, from which:

A larch 10 in. dia. bears N 80° E 40 lks (26.4 ft.) dist.

A pine 20 in. dia. bears S 30° E 90 lks. (59.4 ft.) dist.

A larch 12 in. dia. bears S 5° W lks. 90 lks. (59.4 ft.) dist.

Forest Service Corner Card, B. Moore, 1979

Found: Oregon State Board of Forestry location poster on N-S fence. Poster says Sec. Corner 30' North. There is fence corner with fence East, West, & South. SW of corner approx. 30' is 14" fir stump - possible BT.

Description of corner evidence found:

Monument Found:

I find no evidence of the original corner monument.

Accessories Found:

No trace was found of the original accessories.

I find the fence corner described in the 1979 Forest Service corner card. The location poster is now nailed to the fence corner. Approximately 30 ft. South is a wire gate where the location poster was probably located in 1979. The fences in the area appears to have been continually maintained in its same location for many years.

The distance from the fence corner to the creek South of the corner fits the topo call within 1/2 a chain.

After calculating different methods for proportioning the corner and comparing their location with that of the fence corner, I decide that the fence corner is the best available evidence of the original corner location.

See also the narrative on the Record of Survey.

Description of monument and accessories I established to perpetuate the original location of this corner:

Monuments Set:

As close to the fence corner as feasible, I set a 3 1/4" aluminum cap, (standard USFS monument marked as shown at right,) on a 5/8" x 30" rebar 29 ins. in the ground the bottom 17 ins. in concrete filled drill hole with magnet alongside for the original corner location.

At the intersection with the Baseline I set a 2" Chesebro & Kalb aluminum cap (marked as shown at the top of the page) on a 5/8" x 24" rebar 2" below the ground level.

Accessories Set for the Monument at the Original Location:



A Douglas fir, 15 ins. diam., bears S 24° W 21.0 ft. marked T1S R38E S5 CC BT on a single blaze with a brass washer marked 2456.

A Douglas fir, 21 ins. diam., bears N 50 3/4° W 37.0 ft. marked T1S R38E S4 CC BT on a single blaze with a brass washer marked 2456.


The closing corner on the Baseline bears N 1°12'08" E 7.49 ft.

The standard corner for Sections 32 & 33 bears S 88°29'52" W 226.23 ft.

Red paint, posts and signs added as needed.

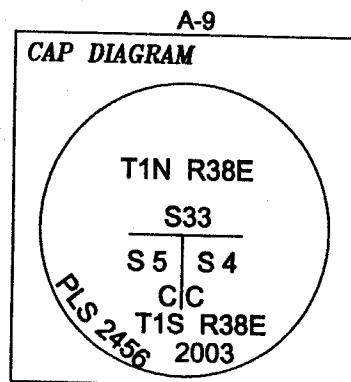

(Continued on Page 2)

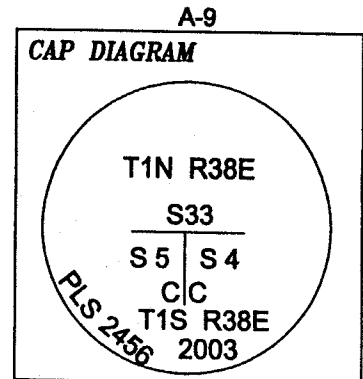

**Description of monument and accessories I established to
perpetuate the original location of this corner:**
(continued)

Accessories Set for the Monument on the Baseline:

A Douglas fir, 15 ins. diam., bears S 18° W 28.1 ft. marked T1S R38E S5 CC BT on a single blaze with a brass washer marked 2456 (This is also an accessory for the amended closing corner and faces amended closing corner).

A Douglas fir, 21 ins. diam., bears N 61° W 32.9 ft. marked T1S R38E S4 CC BT on a single blaze with a brass washer marked 2456 (This is also an accessory for the amended closing corner and it faces amended closing corner).

The amended closing corner bears S 1°12'08" W 7.49 ft.

The standard corner for Sections 32 & 33 bears S 89°36'20" W 226.31.

Red paint, posts and signs added as needed.

NAD 83 (CORS 2002) Coordinates for Monument on Baseline:

Geographic	State Plane (North Zone)
45°30'52.7223" N	N 208,192.553 Meters
118°04'33.9903" W	E 2,689,352.538 Meters
Convergence 1° 43'08"	

Equipment: Staff compass with tripod, Var. 18° E,
Nikon Total Station, loggers tape, clinometer

Date: August 15, 2003

Crew: Evelyn Kalb, Richard Chesebro

*See also the Record of Survey filed
concurrently with this certification.*

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Evelyn R. Kalb 1/19/04

OREGON
July 25, 1990
Evelyn R. Kalb
2456

EXPIRES: 06/30/2005

UNION COUNTY
SURVEYOR

Date Received 2/3/04

Date Filed 2/25/04

Filed By R. ROBINSON, DGS 274

File Number 004-2004R