


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner originally established by David T. Thompson under GLO contract Number 120, dated Sept. 3, 1863. Surveyor General record states:

Set post for quarter sect. Corner. Raised mound of earth and deposited a charred stake.

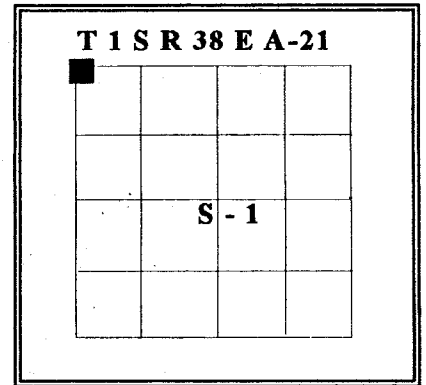

No record of subsequent monumentation found in the Union County Survey records.

DESCRIPTION OF CORNER EVIDENCE FOUND:

None. Area is under cultivation.


See Map of Survey Number 022-1997.

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At a point record bearing and distance from the corner to sections 35 and 36, I set 2-1/2 inch by 30 inch aluminum pipe with aluminum cap marked as shown, 34 inches in the ground.

From which, new B Os;

- A 5/8" by 30" rebar bears N 54°E, 9.55 feet, with 1-1/2" aluminum cap marked "UCS NE RP".
- A 5/8" by 30" rebar bears S 44°E, 10.40 feet, with 1-1/2" aluminum cap marked "UCS SE RP".
- A 5/8" by 30" rebar bears S 52°W, 13.15 feet, with 1-1/2" aluminum cap marked "UCS SW RP".
- A 5/8" by 30" rebar bears N 38°W, 15.25 feet, with 1-1/2" aluminum cap marked "UCS NW RP".

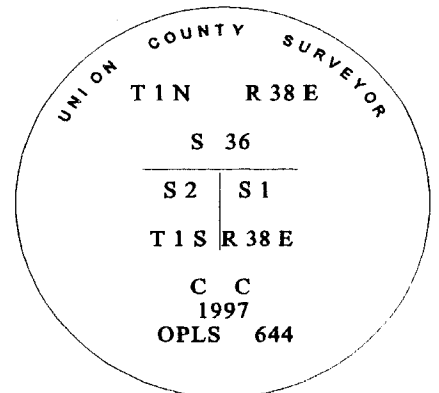

I hereby certify that the above corner point was perpetuated as hereon described on July 23, 1997.

Witnessed by: Jeff Petersen
Jeff Madsen

I used a steel tape and magnetic compass in the establishment of new accessories. I used 18° east declination and the measurement was taken to the center of the aluminum cap on the rebar.



Renewal Date July 30, 1999

UNION COUNTY SURVEYOR

Date Received 8-28-97

Date Filed 9-13-97

By [Signature]

File No. 032-1997R

GEODETTIC CONTROL DATA

**OREGON STATE PLANE, NORTH ZONE (3601)
UNION COUNTY, OREGON**

STA. NAME: 9904

SECTION CORNER:

SEC 35 | 36 TWP.1 N. RGE.38 E

SEC. 2 | 1 TWP.1 S. RGE.38 E

UNION COUNTY, OREGON

DATE TIED: JULY, 1999

GEODETTIC COOR: NAD 83(91)

LAT: 45:30'53.07426" N

LONG: 118:00'54.36619" W

SURVEYOR: WALTER L. CASWELL
PLS 737

SP. COOR: NAD 83(91)

N: 683557.089 INT.FT

FIRM: EAGLE GPS SURVEY CORP
6110 SW LOMBARD AVE.
BEAVERTON, OR. 97008-4736
(503) 643-1073

E: 8838965.237 INT.FT.

THETA: 1:45'44.118"

TYPE: GPS


SCALE FACTOR: 0.999912793

ORDER: SECOND CLASS: 1


ELEV: 2793.09 U.S.FT.

ELEV. DATUM: NGVD 1929(1947)

DIRECTIONS "TO REACH":



Albert Hertel 10-14-99



EXPIRES: 06/30/01

1 METER = 3.280833... U.S. FEET = 39.37 INCHES EXACTLY
1 METER = 3.280839895 INTL. FEET OR 1 INCH = 2.54CM. EXACTLY
TO CALCULATE ELEVATION FACTOR (IN THE NORTH AMERICAN CONTINENT)
DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)

JOB 99-005
SHEET 25 OF 63