




Land Surveying & Boundary Consulting

P.O. Box 19.
Mill City, OR 97360
(503) 897-2722

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

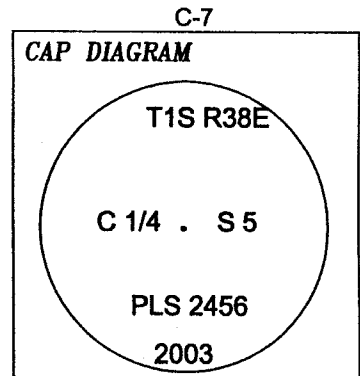

History of original corner establishment:

Corner not previously established.

Description of monument and accessories I established to perpetuate the original location of this corner:

Monument Set:

At the calculated position I set a standard U.S.F.S. monument (3 1/4 in. x 30 in. diam. aluminum cap on a 2 1/2 in. aluminum pipe), buried 24 ins. in the ground with a rock collar and a magnet at its base.

Accessories Set:

A Douglas fir, 30 ins. diam., bears N 88° E 34.4 ft., marked X BT with a brass washer marked PLS 2456 on a double blaze.

A western larch, 13 ins. diam., bears S 72 3/4° E 33.7 ft., marked C 1/4 S5 BT with a brass washer marked PLS 2456 on a double blaze.

A ponderosa pine, 27 ins. diam., bears S 53 1/4° W 26.9 ft., marked C 1/4 S5 BT with a brass washer marked PLS 2456 on a double blaze.

A white fir, 5 ins. diam., bears N 32 3/4° W 5.2 ft., marked X BT with a brass washer marked PLS 2456 on a double blaze.

Signs, red paint and nail side center on bearing trees.

NAD 83 (CORS 2002) Coordinates:

Geographic	State Plane (North Zone)
45°30'26.0806" N	N 207,346.751 Meters
118°05'10.5400" W	E 2,688,584.307 Meters
Convergence: 1°42'42"	

Equipment: Nikon Total Station

Date: Sept. 3, 2003

Crew: Ron Walter, Michael Cordoza, Collin Edwards-Hill

See also the Record of Survey filed concurrently with this certification.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Evelyn R. Kalb 12/29/03

OREGON
July 25, 1990
Evelyn R. Kalb
2456

EXPIRES: 06/30/2005

**UNION COUNTY
SURVEYOR**

Date Received 12/8/03

Date Filed 12/31/03

Filed By R. ROBINSON, DEPUTY

File Number 058-2003R