


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**History of original corner establishment:**

40.18 Set a basalt stone 12x10x5 ins 8 ins in the ground for ¼ sec. cor. marked ¼ on N. face, from which,

A fir 6 ins in diam. bears N. 45° W. 70 lks. dist. marked ¼S BT  
A fir 20 ins in diam. bears S. 15° E. 54 lks. dist. marked ¼S BT

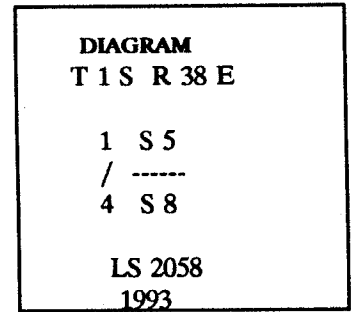

**Description of corner evidence found:**

A 19" fir bears N 50¼° W, 45.7 feet with scar visible. At approximate bearing and distance I find a small mound of stone, mostly buried. In the mound is a stone 10x12x3 with what I believe is a 4 visible and the portion of the stone above broken off. I search for the broken piece to no avail.

**Description of monument and accessories I established to perpetuate the original location of this corner:**

At the location of the found stone, set a 2½ x 30" aluminum pipe with 3" cap 20" in the ground with mound of stone to cap, from which:

A 17" pine bears N 12° E, 63.3 feet scribed ¼S5 BT  
A 12" fir bears S 78° E, 49.7 feet scribed ¼S8 BT  
A 9" fir bears S 6° W, 29.0 feet scribed ¼S8 BT

EMERSON COUNTY  
REGISTER  
Date Received 10/18/94  
Date Filed 10/22/94  
By Gregory T. Clarke  
File No. 087-1994R

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*R/E Stoll 10/94*  
OREGON  
JULY 15 1983  
RONALD E. STOLL  
2058

Office of \_\_\_\_\_ County of \_\_\_\_\_  
State of \_\_\_\_\_ I hereby certify that the within instrument was filed in this office  
for record on the \_\_\_\_\_ day of \_\_\_\_\_, 19\_\_\_\_

\_\_\_\_\_  
(COUNTY OFFICIAL) by \_\_\_\_\_ (DEPUTY)

E-7



Land Surveying & Boundary Consulting

P.O. Box 19  
Mill City, OR 97360  
(503) 897-2722

**CERTIFIED RECORD OF LAND  
CORNER MONUMENTATION**

**History of original corner establishment:**

**Frank W. Campbell, 1883, Contract No. 468**

Set a basalt stone 12 x 10 x 5 ins. 8 ins. in the ground, marked 1/4 on N face, from which:

A fir 20 inch in dia. bears S 15° E 54 lks. (35.6 ft.) dist. marked 1/4S BT

A fir 6 inch in dia. bears N 45° W 70 lks. (46.2 ft.) dist. marked 1/4S BT

**F. A. Monroe, J.F., December 11, 1933**

Found: a rock 12" above the ground

A 14" D.F. bears N 33° W 50 lks. (33.0 ft.), overgrown, added location poster.

A 20" D.F. stump 5' high, bears S 30° E 70 lks. (46.2 ft.), marked 1/4 S BT

Corner is on a very steep E rocky open slope in P.P. type. The NW corner of Mr. Horn's fence around the NENE1/4 section 8 T1S, R34E is 17 chaines east of corner.

**Ronald E. Stoll, PLS 2058, 1994, C.S. 050-1994, Union Co. 088-1994R**

*Found:* I find a small mound of stone, mostly buried. In the mound is a stone 10 x 12 x 3 with what I believe is a 4 visible and the portion of the stone above broken off. I search for the broken piece to no avail.

A 19" fir bears N 50 1/4° W 45.7 feet with scar visible.

*Set:* At the location of the found stone, I set a 2 1/2 x 30" aluminum pipe with 3" cap 20" in the ground with mound of stone to cap, from which:

A 17" pine bears N 12° E 63.3 feet scribed 1/4 S5 BT

A 12" fir bears S 78° E 49.7 feet scribed 1/4 S8 BT

A 9" fir bears S 6° W 29.0 feet scribed 1/4 S8 BT

**Description of corner evidence found:**

*Monument Found:*

Found a 3 1/4 in. aluminum cap on a 2 1/2 in. aluminum pipe, firmly set with 8 ins. showing above the ground. A guard post with Land Survey Monument Sign bears westerly 1.0 ft.

*Accessories Found:*

Original southeast bearing tree not found.

A Douglas fir, 22 ins. diam., bears N 50 1/4° W 45.7 ft., alive and healthy with visible scribing. (Orig. BT)

A ponderosa pine, 23 ins. diam., bears N 12° E 63.3 ft., alive and healthy with scribing visible on a double blaze. (Stoll BT)

A Douglas fir, 16 ins. diam., bears S 78° E 49.7 ft., alive and healthy, with scribing visible on a double blaze. (Stoll BT)

A Douglas fir, 12 ins. diam., bears S 6° W 29.0 ft., alive and healthy, with scribing visible on a double blaze. (Stoll BT)

**Description of monument and accessories I established to perpetuate the original location of this corner:**

*Accessories Set:*

Red paint, posts and signs added as needed.

*NAD 83 (CORS 2002) Coordinates:*


Geographic State Plane (North Zone)  
45°29'59.7882" N N 206,535.638 Meters  
118°05'10.2774" W E 2,688,614.251 Meters  
Convergence 1°42'43"

*Equipment:* Hand compass, Var. 18° E, logger's tape, clinometer

*Date:* July 11, 2003

*Crew:* Ron Walter

*See also the Record of Survey filed concurrently with this certification.*

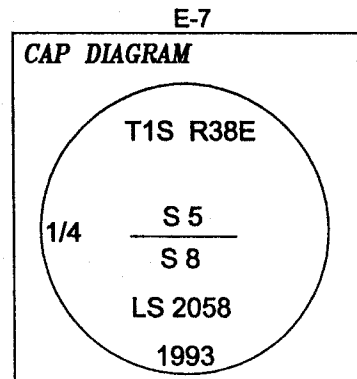

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Evelyn R. Kalb 11/25/03*

OREGON  
July 25, 1990  
Evelyn R. Kalb  
2456

EXPIRES: 06/30/2005

UNION COUNTY  
SURVEYOR  
Date Received 12/8/03  
Date Filed 12/31/03  
Filed By R. ROBINSON, DEPUTY  
File Number 062-2003R