

UNION COUNTY SURVEYOR
CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:


Corner was established by David T. Thompson under GLO contract Number 103, dated September 3, 1863. The Surveyor General states:

Set post for ¼ sec. corner, from which:

A Pine 40" dia. bears N30°E, 66 lks.

A Pine 48" dia. bears S25°W, 43 lks.

Survey 102-72 states "found 1/4 corner, 2" pipe with brass cap".

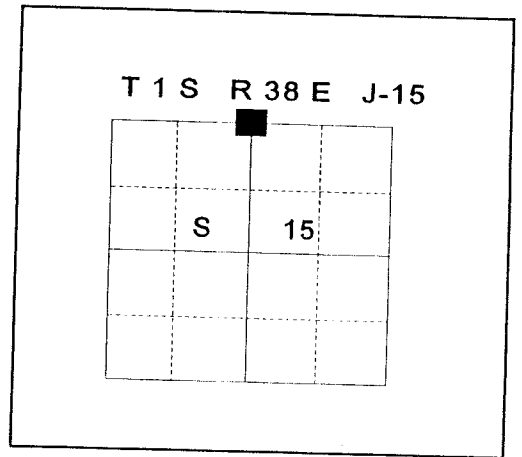

Description of corner evidence found:

Found 2" pipe with 3" brass cap stamped as shown below. 8 inches below the surface of the road.

Found 2" pipe with 3" brass cap stamped "REF 1/4 C T1S R38E S10 S15 S29°W 31.6 ". The pipe bears N29°E 31.6 feet from the 1/4 corner.

Found 2" pipe with 3" brass cap stamped " REF 1/4 C T1S R38E S10 S15 S40°E 35.7 ". The pipe bears N40°W 35.7 feet from the 1/4 corner.

Description of monument and accessories I established to perpetuate the original location of this corner:

NEW BEARING OBJECTS:

A 5/8" x 30" rebar with 1½" aluminum cap bears S37°E, 32.54 feet marked UNION COUNTY SURVEYOR SE RP.

A 5/8" x 30" rebar with 1½" aluminum cap bears S58°W, 45.00 feet marked UNION COUNTY SURVEYOR SW RP.


I hereby certify that the corner was monumented on July 2, 1996.

Witness: Mark Durbin, Jeff Madsen

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Jeffery P. Petersen
OREGON
JULY 20, 1993
JEFFERY P. PETERSEN
2625

Renewal Date: December, 31 1996

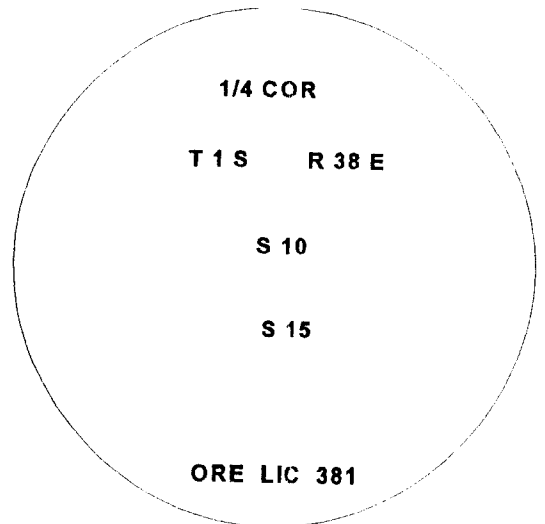

UNION COUNTY SURVEYOR	
Date Received	<u>7-10-96</u>
Date Filed	<u>7-10-96</u>
Filed By	<u>R. ROBINSON, DEPUTY</u>
File Number	<u>064-1996 R</u>

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 17° East declination. The distances are to the center of the brass or aluminum caps on the bearing objects.

J-15

HORIZONTAL CONTROL DATA
UNION COUNTY, OREGON
OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 200705

1/4 SECTION CORNER COMMON TO SECTIONS: 10 and 15

TWP. 1 S. RGE. 38 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: Feb. 27, 2007

LAT: 45 ° 29 ' 8.44367 " N

SURVEYOR: RICK G. ROBINSON
OPLS 2219

LONG: 118 ° 2 ' 43.74862 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN
2006 ADAMS AVENUE
LAGRANDE, OR 97850
(541) 963-6092

SP. COOR: NAD 83(91)

N: 672727.023 INT FT.

E: 8831502.293 INT FT.

TYPE: GPS

THETA: 1 ° 44 ' 26.5459228 "

ORDER: SECOND CLASS: 1



SCALE FACTOR: 0.9999098597

ELEV: 2800.02 US FT.

ELEV: DATUM: NGVD 29

COMMENTS:

Corner is 2" iron pipe 8 inches below the ground
with 3" brass cap marked as shown:

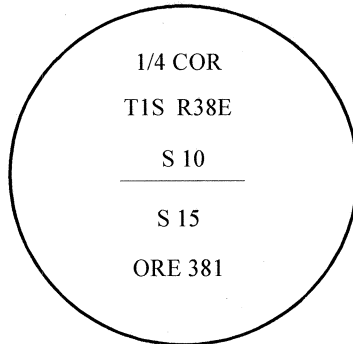

Renewal Date: December 31, 2008

1 METER = 3.2808333333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR (IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)