

**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**


**HISTORY OF ORIGINAL CORNER ESTABLISHMENT:**

Corner established by D. Thompson, under GLO  
Contract number 103, dated January 20, 1863.  
Surveyor General record states:  
Set post with mound of earth as per instructions

No record of subsequent monumentation found in  
UNION COUNTY survey records.

**DESCRIPTION OF CORNER EVIDENCE FOUND:**

Found 1" Square Iron Rod. 1/4 corner is indicated on the plat of  
Summerville, the Plat of Shaw Addition, Survey Numbers 16-71 and  
29-71. Survey Numbers 46-76, 98-79 and Partition Plat Number 1997-  
17 call the 1" square iron rod as the South 1/4 corner of Section 12.

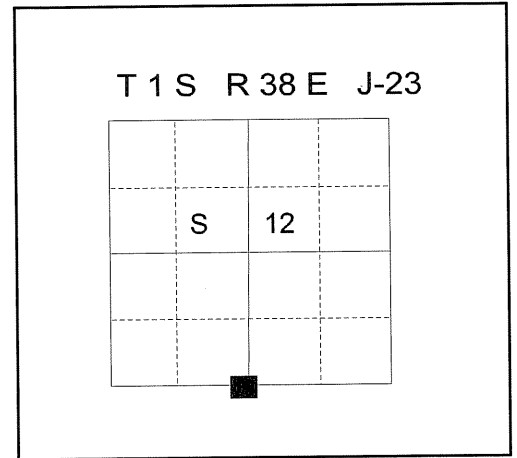

**DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED  
TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:**

At the position of the found pipe, I set a 2 1/2" x 30" aluminum pipe with 2 1/2" aluminum cap marked as shown,  
over the found iron rod, 29" in the ground, from which;

**NEW BEARING OBJECTS:**

A 5/8"X 30" rebar with 1 1/2" aluminum cap bears N 38°53'35" E, a distance of 12.31 feet, marked NE RP.  
A 5/8"X 30" rebar with 1 1/2" aluminum cap bears S 26°55'52" E, a distance of 22.39 feet, marked SE RP.  
A spike in Power Pole Number 027125101 bears S 66°W, a distance of 46.82 feet.  
A spike in Power Pole Number 027125102 bears N 10°W, a distance of 91.24 feet

I hereby certify that the corner was monumented on February 7 , 2007.  
Witness: Leo Castillo

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

OREGON  
JULY 13, 1973  
**GREGORY T. BLACKMAN**  
991

Renewal Date: Dec. 31, 2007

UNION COUNTY SURVEYOR

T1S R38E

1/4 ——— S 12  
S 13

2007

OPLS 991

**UNION COUNTY  
SURVEYOR**

Date Received 4/14/07

Date Filed 4/14/07

Filed By R. ROBINSON DEPUTY

File Number 010-2007R

I used a Leica Gps 500 Receiver in the establishment of the iron pin accessories. The bearings are WGS 84 Datum. The distances are to the center of the aluminum cap. The bearings to the spikes in the power pole accessories were taken with a magnetic compass using 18° magnetic declination with the distances measured with a steel tape.

# HORIZONTAL CONTROL DATA

## UNION COUNTY, OREGON

### OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 200704

1/4 SECTION CORNER COMMON TO SECTIONS: 12 and 13

TWP. 1 S. RGE. 38 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: February 27, 2007

LAT: 45 ° 29 ' 9.25987 " N

SURVEYOR: RICK G. ROBINSON  
OPLS 2219

LONG: 118 ° 0 ' 14.38540 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN  
2006 ADAMS AVENUE  
LAGRANDE, OR 97850  
(541) 963-6092

SP. COOR: NAD 83(91)

N: 673135.604 INT FT.

E: 8842135.464 INT FT.

TYPE: GPS

THETA: 1 ° 46 ' 12.4722312 "

ORDER: SECOND CLASS: 1



SCALE FACTOR: 0.9999098815

ELEV: 2699.34 US FT.

ELEV: DATUM: NGVD 29

**COMMENTS:**

Corner is 2 1/2"x30" aluminum pipe with  
2 1/2" aluminum cap marked as shown:

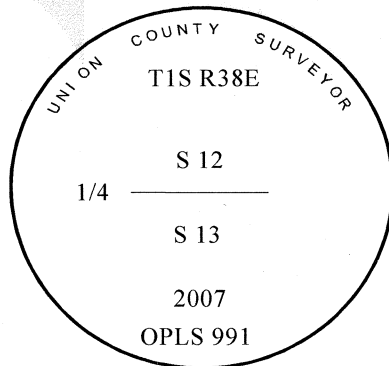

Renewal Date: December 31, 2008

1 METER = 3.2808333333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR ( IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)