


Index File No. R 11 CORNER RECORD (SEARCH) (Ref. FSM 7151.4) Tract or Survey No. _____ Cor. $\frac{1}{4}$ Sec. co. No. 6 Sec. 21
 T 1S R. 38E R.D. La Grande County Union
 Merid. Will. N.F. W-W State Oregon

CORNER DIAGRAM

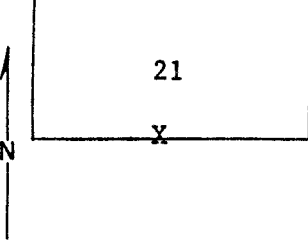

DESCRIBE CORNER MONUMENT FOUND

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

Mound of stone
 found one BT snag
 Poster on 18" ~~LP~~

PHOTO IDENTIFICATION DATA

Photo No. _____
 Filed At. _____
 Object Ident. _____
 Ident. By _____
Signature

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

PLANE COORDINATE POSITION DATA

State _____ Zone _____
 X _____
 Y _____
 Estab. By _____
Agency

Signature	Title	Division	Headquarters	Date	7100-52 (3/68)
Waybe Hyde	F, Aid (gen)	Whitman	La Grande	1960	

**UNION COUNTY
 SURVEYOR**

Data Received _____

Date Filed _____

By _____

File No. 36-87R

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner established by David P. Thompson under GLO Contract number 103, dated September 3, 1863. Surveyor General record states: Set Post in mound of Stone at 1/4 corner position.

Union County Survey No. 2-77 notes at corner position, a mound of stone at fence corner. Fence running East and South with K-Tag dated 1950.

No record of subsequent monumentation found in UNION COUNTY survey records.

DESCRIPTION OF CORNER EVIDENCE FOUND:

Found Mound of Stone by existing fence corner and old Oregon Department of Forestry K- Tag.

See Survey Number 017-2011.

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At the position which falls in center of existing mound of stone, I set a 1" x 30" pipe monument with 2 1/2" Brass cap marked as shown below, 29" in the ground, from which:

NEW BEARING TREES:

A 20" Ponderosa Pine bears North 54° East, a distance of 6.88 feet, marked 1/4 S21 BT. (With O.D.F. K-Tag)


A 6" Douglas Fir bears South 64° East, a distance of 14.85 feet, marked 1/4 S28 BT.

A 13" Douglas Fir bears South 56° West, a distance of 34.00 feet, marked 1/4 S28 BT.

A 6" Douglas Fir bears North 59° West, a distance of 22.54 feet, marked 1/4 S21 BT.

I hereby certify that the corner was monumented on June 14, 2011.

Witness: Gregory T. Blackman Jr. and Jeff Hsu

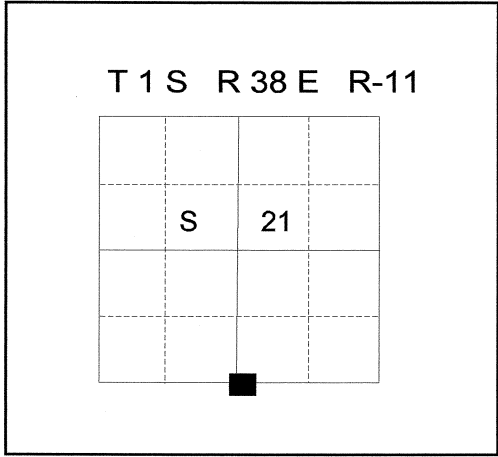

REGISTERED
PROFESSIONAL
LAND SURVEYOR



OREGON
July 17, 1986
RICK G. ROBINSON
2219

Renewal Date: December 31, 2012

BAGETT, GRIFFITH & BLACKMAN

T1S R38E

S21

1/4 ————— S28

2011

OPLS 2219

**UNION COUNTY
SURVEYOR**

Date Received 7/19/2011

Date Filed 7/19/2011

Filed By Gregory T. Blackman Jr.

File Number 030-2011R

I used a steel tape and magnetic compass in the establishment of new accessories. The magnetic declination used was 16° East. The distance to the bearing trees are to a 50d spike driven on the right side of the tree at the root crown. I attached a brass washer marked OPLS 2219 to the BT blaze.