

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by David P. Thompson under GLO contract number 103, dated September 3, 1863. Surveyor General record states:

Set post in ground for cor to sec 21-22-27 and 28

- Pine 10 in dia N28°W 118 lks
- Pine 8 in dia N38°E 60 lks
- Pine 8 in dia S58°E 50 lks
- Pine 10 in dia S32°W 75 lks

Union County Survey 2-77 states " Found wooden stake pointed out as the section corner by Mr. Dobbin. Set spike and put PK nails in an 8" Fir 1.35 feet and a 7" Fir 1.53 feet."

No record of subsequent monumentation found in Union County survey records.

Description of corner evidence found:

Found no evidence of the original corner monument.

- Found a stump hole at NW BT position
- Found a stump with blaze evident at NE BT position
- Found a stump hole at SE BT position
- Found a stump at SW BT position

Found PK nails set in Fir trees as per Union County Survey no. 2-77

Description of monument and accessories I established to perpetuate the original location of this corner:




At position determined by Union County survey 2-77, I set a 24 x 30" aluminum pipe with aluminum cap marked as shown, 30 inches in the ground, from which:

- New Bearing Trees;
- A 8 inch diameter Tamarack bears N2°E, 20.47 feet marked T1S R38E S22 BT
 - A 20 inch diameter Douglas Fir bears S53°E, 53.10 feet marked T1S R38E S27 BT
 - A 13 inch diameter White Fir bears S2°W, 3.32 feet marked T1S R38E S28 BT
 - A 8 inch diameter Douglas Fir bears N64°W, 9.13 feet marked T1S R38E S21 BT

Painted a 6 inch red band around all BTs and attached signs.

I hereby certify that the above corner point was perpetuated as hereon described on June 14, 1990.

Witnesses: Jeff Petersen
Tony Cruse

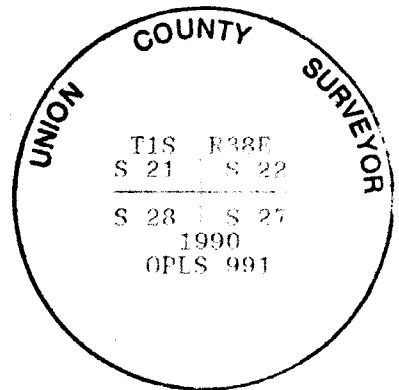

I used a steel tape and magnetic compass in the establishment of new accessories. I used 18° magnetic declination. The distances are to a 50 spike driven in the right side of the root crown. I attached a brass washer marked OPLS 991 to the BT blaze.

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of..... 19.....

(COUNTY OFFICIAL)

UNION COUNTY SURVEYOR (DEPUTY)

Date Received 8-3-90

Date Filed 8-4-90

By Gregory I. Blackman

File No. 44-90R

Form R6-7100-57 (9/71)

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 1 S., R. 38 E., Willamette Meridian, Oregon

<p>FEET</p> <p>5306.60</p>	<p>A fir, 17 ins. diam., bears S. 38¼° E., 15.2 ft. dist., mkd. 1/4 S28 BT.</p> <p>A pine, 8 ins. diam., bears S. 87¼° W., 19.9 ft. dist., mkd. 1/4 S29 BT.</p> <p>Deposit a magnet in a white plastic case at the base of the stainless steel post.</p> <p>Corner is located E., 29 ft. dist. from an abandoned rock road, 12 ft. wide, extending N. 40° E. and S. 70° W.</p> <p>Continue over broken E. slope.</p> <p>Point for the cor. of secs. 20, 21, 28, and 29, at proportionate dist., there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr> <td>T 1 S</td> <td>R 38 E</td> </tr> <tr> <td>S 20</td> <td>S 21</td> </tr> <tr> <td>S 29</td> <td>S 28</td> </tr> </table> <p>2003</p> </div> <p>from which</p> <p>A tamarack, 17 ins. diam., bears N. 11¼° E., 22.9 ft. dist., mkd. T1S R38E S21 BT.</p> <p>A fir, 6 ins. diam., bears S. 34¼° E., 25.4 ft. dist., mkd. T1S R38E S28 BT.</p> <p>A fir, 4 ins. diam., bears S. 16¼° W., 4.7 ft. dist., mkd. T1S R38E S29 BT.</p> <p>A fir, 18 ins. diam., bears N. 87¼° W., 39.6 ft. dist., mkd. T1S R38E S20 BT.</p> <p>From this point, the cor. of secs. 21, 22, 27, and 28, bears N. 89° 39' 04" E., 5236.18 ft. dist., perpetuated by Gregory T. Blackman, Registered Professional Land Surveyor No. 991, in 1990, recorded in the Union County survey records, survey file No. 44-90R, monumented with an aluminum post, 2½ ins. diam., firmly set, flush with the ground, with aluminum cap mkd.</p>	T 1 S	R 38 E	S 20	S 21	S 29	S 28
T 1 S	R 38 E						
S 20	S 21						
S 29	S 28						

R-13

<p>UNION COUNTY SURVEYOR</p>	
Date Received	<u>6/12/11</u>
Date Filed	<u>6/23/11</u>
By	<u>R. ROBINSON, DGP/DM</u>
File No.	<u>016-2011R</u>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 1 S., R. 38 E., Willamette Meridian, Oregon

FEET	UNION COUNTY SURVEYOR T 1 S R 38 E <table border="1" style="margin: auto;"> <tr><td>21</td><td>22</td></tr> <tr><td>28</td><td>27</td></tr> </table> 1990 OPLS-991	21	22	28	27		
21	22						
28	27						
	<p>from which the remains of an original bearing tree</p> <p>The pitched over remains of a stump, size and species indeterminate, bears N. 38° E., 39.6 ft. dist., with axe marks visible. (Record, pine)</p> <p>and bearing trees mkd. by Blackman</p> <p>A tamarack, 13 ins. diam., bears N. 4¼° E., 20.4 ft. dist., with healed double blazes.</p> <p>A fir, 29 ins. diam., bears S. 6° E., 3.4 ft. dist., with healed double blazes.</p> <p>A fir, 25 ins. diam., bears S. 52½° W., 53.0 ft. dist., with healed double blazes.</p> <p>A fir, 12 ins. diam., bears N. 62° W., 8.9 ft. dist., with healed double blazes.</p> <p>The N. sec. cor. of secs. 21 and 28 was searched for but not found.</p> <p>From this same point, the cor. of secs. 19, 20, 29, and 30, bears N. 89° 46' 05" W., 5282.09 ft. dist., determined at the center of a scattered mound of stone, 3 ft. diam., and is accepted as the best available evidence of the cor. position.</p> <p>Cement an aluminum rod, 22 ins. long, ¼ in. diam., 14 ins. in the ground, the bottom 8 ins. in a drill hole, in a collar of stone, with aluminum cap mkd.</p> <table border="1" style="margin: auto;"> <tr><td>T 1 S</td><td>R 38 E</td></tr> <tr><td>S 19</td><td>S 20</td></tr> <tr><td>S 30</td><td>S 29</td></tr> </table> 2003	T 1 S	R 38 E	S 19	S 20	S 30	S 29
T 1 S	R 38 E						
S 19	S 20						
S 30	S 29						
	<p>from which</p>						

R-13

UNION COUNTY SURVEYOR	
Date Received	6/12/11
Date Filed	6/23/11
By	R. ROBINSON, DEPUTY
File No.	016-2011R