


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner established by David Thompson under GLO Contract number 103, dated September 3, 1863. Surveyor General record states: Set a post for corner in mound of Stone: Corner was visited by Co. Surveyor D.T. McLellan on July 14, 1921, found mound of stone. (See Survey Old Book Page 367) No record of subsequent monumentation found in UNION COUNTY survey records.

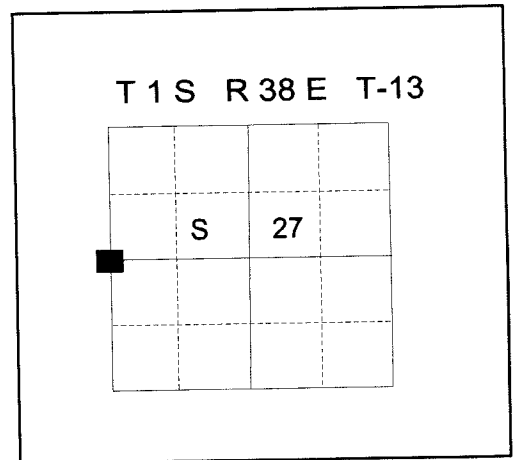

DESCRIPTION OF CORNER EVIDENCE FOUND:

Found mound of stone with a basalt stone 11"x11"x8", marked ¼ in said mound of stone. Found 1" steel drive shaft in the remains of an East-West Fence 6.23 ft. North.

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED

TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At Stone position, I set a 2½" x 30" Aluminum pipe with cap marked as shown below, 20 inches in the ground, and raised a mound of stone with a 3 foot base to top of cap. Buried stone to the East of the pipe.

NEW BEARING TREES AND OBJECT:

A 1" steel drive shaft bears N 22° E, a distance of 6.23 feet.

An 8" Ponderosa Pine bears S 77° E, a distance of 32.95 feet, marked X B.T.

An 8" Ponderosa Pine bears S 20° W, a distance of 17.05 feet, Marked ¼ S28 BT


A 10" Ponderosa Pine bears N 30° W, a distance of 40.63 feet, marked ¼ S 28 BT

I hereby certify that the corner was monumented on September 27, 2005
Witness: Greg Blackman, Jr.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
JULY 13, 1973
GREGORY T. BLACKMAN
991

Renewal Date: December 31, 2005

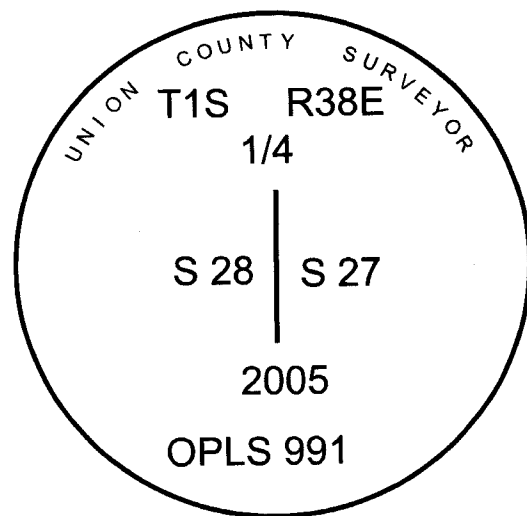

**UNION COUNTY
SURVEYOR**

Date Received 10/21/05

Date Filed 10/21/05

Filed By R. ROBINSON, Deputy

File Number 038-2005R

I used a steel tape and magnetic compass in the establishment of new bearing trees. The magnetic declination used was 18° East. The distance to the bearing trees is to a 50d spike driven on the right side of the trees at the root crown. I attached a brass washer marked OPLS 991 to the BT blaze. Distance to bearing object is to the center of the 1" drive shaft