

UNION COUNTY SURVEYOR

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner originally established by D. Thompson, under GLO contract Number 103, dated January 20, 1863. Surveyor General record states:


Set post for 1/4 sec corner in mound of earth with charred stake pits trench as per instructions.

No record of subsequent monumentation found in Union County survey records.

DESCRIPTION OF CORNER EVIDENCE FOUND:

No original evidence found

T 1 S R 38 E T-17



See Survey #003-2004

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED

TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At proportioned position I set a 2½" x 30" aluminum pipe with aluminum cap marked as shown below, 14" in the ground with a mound of stone 3 feet from base to top of cap from which:

NEW BEARING OBJECTS:

A 5/8" x 30" rebar with 1 ½" aluminum cap bears N18°E, a distance of 23.71 feet, marked "BGB SURVEY MARKER NE RP".



A 5/8" x 30" rebar with 1 ½" aluminum cap bears S15°E, a distance of 30.36 feet, marked "BGB SURVEY MARKER SE RP" in fence line.

A 5/8" x 30" rebar with 1 ½" aluminum cap bears S56°W, a distance of 6.10 feet, marked "BGB SURVEY MARKER SW RP" in fence line.

A 5/8" x 30" rebar with 1 1/2" aluminum cap bears S88°E, a distance of 37.91 feet, marked "BGB SURVEY MARKER SE RP".

I hereby certify that the corner was monumented on April 5, 2004.

Witness: Gregory T. Blackman Jr.

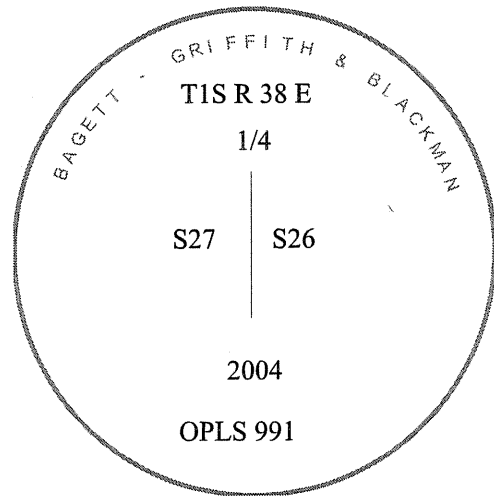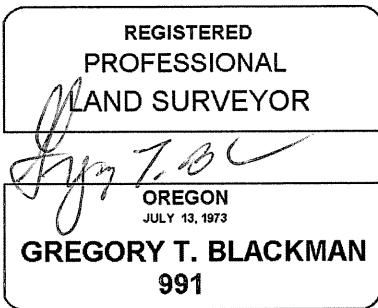

UNION COUNTY SURVEYOR

Date Received 12/30/04

Date Filed 12/30/04

Filed By R. Robinson, Deputy

File Number 014-2004R

I used a Leica GPS-500 in the establishment of the new accessories. The basis of bearings is the same as that on survey number 003-2004. The distances are to the center of a 5/8" rebar with a 1½" aluminum cap.

HORIZONTAL CONTROL DATA

UNION COUNTY, OREGON

OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 200526

1/4 SECTION CORNER COMMON TO SECTIONS 26 and 27

TWP. 1 S. RGE. 38 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: August 16, 2005

LAT: 45 ° 26 ' 57.48009 " N

SURVEYOR: GREGORY T. BLACKMAN
OPLS 991

LONG: 118 ° 2 ' 5.680268 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN
2006 Adams Avenue
La Grande, OR 97850
(541) 963-6092

SP. COOR: NAD 83(91)

N: 659551.979 INT FT.

E: 8834617.687 INT FT.

TYPE: GPS

THETA: 1 ° 44 ' 53.543463 "

ORDER: SECOND CLASS: 1



SCALE FACTOR: 0.9999065514

ELEV: 2707.60 US FT.

ELEV: DATUM: NGVD 29

COMMENTS:

2 1/2" Aluminum monument marked:

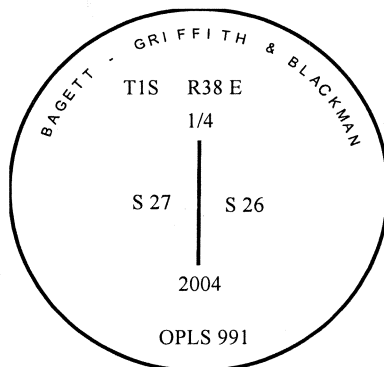

Renewal Date: December 31, 2005

1 METER = 3.2808333333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR (IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)