


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by Timothy W. Davenport under GLO contract number 120, dated July 20, 1863. Surveyor General record states:

Set post corner to Secs 33 + 34 on brink of bluff.
Made mound of stone.



No record of subsequent monumentation found in Union County survey records.

Description of corner evidence found:

Found a mound of stone at the top of a round bluff.

Found the position to be harmonious with the state plane coordinate as shown on Oregon State Department of Transportation drawing number 8B-16-17.

Position previously used by map of survey number 25-78.

Monument is 3 feet South of a recently built East-West fence line, and at the South end of an old fenceline running North from the monument.

See map of Union County survey number 31-89.

Description of monument and accessories established to perpetuate the original location of this corner:

At the center of the mound of stone, I set a 2 1/2" x 30" aluminum pipe with aluminum cap marked as shown, 26 inches in the ground, from which:


New Bearing Objects

- A 2 inch angle iron fence post set in concrete with fences running East-West and North bears East, 45.73 feet.
- A 4'x2'x2' high rock outcrop bears S1°E, 6.75 feet marked X BO on Northwest corner.
- A 4'x3'x2' high rock outcrop bears S36°W, 23.67 feet marked X BO on North end.
- A PK nail driven on the West side of a 4'x3 1/2'x2' high rock outcrop bears N8°W, 10.05 feet.

Raised a mound of stone around monument,
3 ft. base to top of cap.

I hereby certify that the above corner point was perpetuated as hereon described on December 19, 1989.

Witnesses: Duane Griffith and Rick Robinson

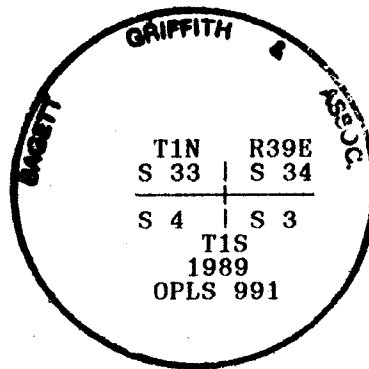

I used a steel tape and magnetic compass in the establishment of new accessories. I used 25° East magnetic declination.

REGISTERED PROFESSIONAL LAND SURVEYOR

Gregory T. Blackman
OREGON
JULY 13, 1973
GREGORY T. BLACKMAN
991

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

UNION COUNTY SURVEYOR
(COUNTY OFFICIAL) _____ (DEPUTY)

Form R6-7100-57 (9/71)

Date Received 12-22-89
Date Filed 12-22-89
By R. ROBINSON, DEPUTY
File No. 236-892

☆ U.S. GOVERNMENT PRINTING OFFICE - 1983-793-276

HORIZONTAL CONTROL DATA

**UNION COUNTY, OREGON
OREGON STATE PLANE, NORTH ZONE (3601)**

STA. NAME: 9205

QUARTER SECTION: SE COR

GEODETIC COOR: NAD 83(91)

SEC. 33 TWP 1 N RGE 39 E

LAT: 45 30'53.29544" N

DATE SURVEYED: MAY, 19, 1992

LONG: 117 55'56.82904" W

**SURVEYOR: WALTER L. CASWELL
PLS 737**

SP. COOR: NAD 83(91)

**FIRM: EAGLE GPS SURVEY CORP
13545 NW SCIENCE PARK DR
PORTLAND, OR. 97229
(503) 643-1073**

N: 684241.825 Int.Ft.

E: 8860140.037 Int.Ft.

THETA: 1 49'15.127"

TYPE: GPS

SCALE FACTOR: 0.999912800

ORDER: SECOND CLASS: 1

ELEV: 2980.72 US.Ft.

ELEV. DATUM: NGVD 29

DIRECTIONS "TO REACH"