


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**HISTORY OF ORIGINAL CORNER ESTABLISHMENT:**

Corner originally monumented by David P. Thompson on GLO Contract number 103 dated September 3, 1863. Surveyor General record states:

Set post for 1/4 sec cor in mound of earth with pits, trench and charred stake as per instructions

No record of subsequent monumentation found in UNION COUNTY survey records.

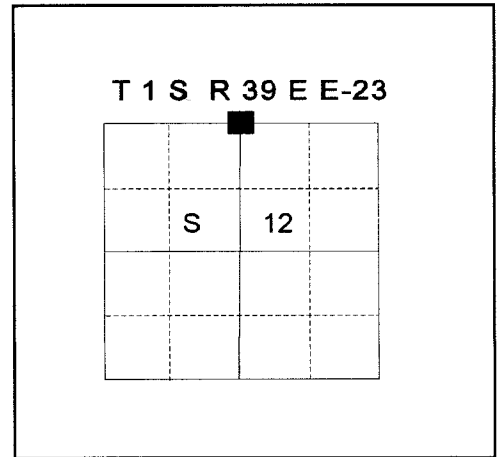

**DESCRIPTION OF CORNER EVIDENCE FOUND:**

No evidence of the original corner or it's accessories were found. Accepted the existing fence corner as the best available evidence of the original corner location.

See Survey Number 022-1998.

**DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:**

At the position described above, I set a 2 1/2" diameter 30" long aluminum pipe with 2 1/2" aluminum cap marked as shown below, 24" in the ground, with a ring of stone around cap, from which:

**NEW BEARING OBJECTS:**

- A 5/8"x30" iron pin with a 1 1/2" aluminum cap marked N RP bears N 9° W, a distance of 19.96 feet
- A 5/8"x30" iron pin with a 1 1/2" aluminum cap marked S RP bears S 2° W, a distance of 11.21 feet
- A 5/8"x30" iron pin with a 1 1/2" aluminum cap marked E RP bears S 82° E, a distance of 17.74 feet
- A 5/8"x30" iron pin with a 1 1/2" aluminum cap marked W RP bears N 88° W, a distance of 30.61 feet


I hereby certify that the corner was monumented on July 7, 1998.  
Witness: Norbert Volny, Jeff Madsen and Greg Engelgau.

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Rick G. Robinson*

OREGON  
July 17, 1986  
RICK G. ROBINSON  
2219

Renewal Date December 31, 1998

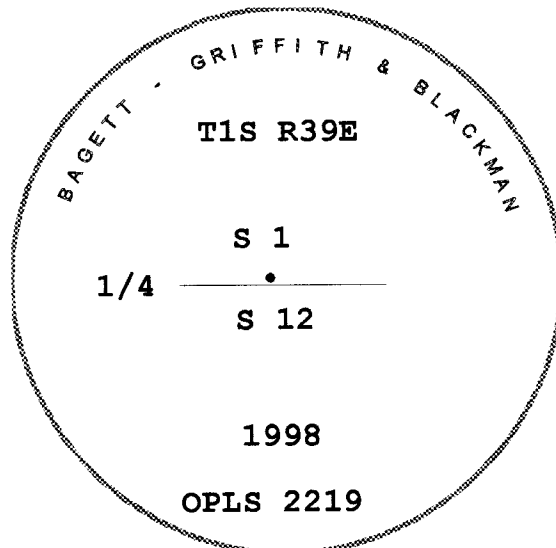

**UNION COUNTY  
SURVEYOR**

Date Received 7-20-98

Date Filed 7-24-98

Filed By *Hayden Y. Deane*

File Number 012-1998R

I used a steel tape and magnetic compass in the establishment of new accessories. The magnetic declination used was 17° East. The distance to the bearing objects is to a punch in the center of the aluminum cap.