


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**HISTORY OF ORIGINAL CORNER ESTABLISHMENT:**  
Corner not previously established.

No record of monumentation found in UNION COUNTY survey records.

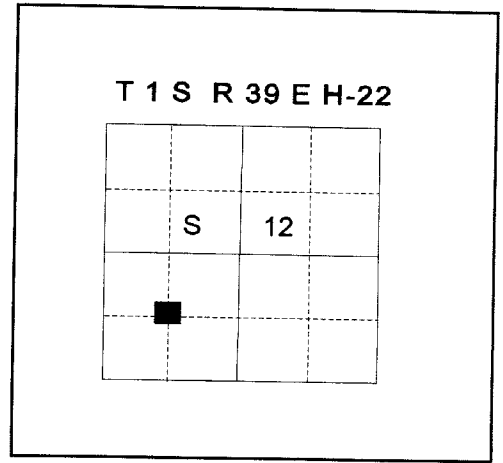

**DESCRIPTION OF CORNER EVIDENCE FOUND:**

Corner not previously established.

See Survey Number 022-1998.

**DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:**

At the position determined by said survey, I set a 2 1/2" diameter 30" long aluminum pipe with 2 1/2" aluminum cap marked as shown below, 28" in the ground, from which:

**NEW BEARING OBJECTS:**

A 19" diameter Ponderosa Pine bears N 23° E, a distance of 28.56 feet marked SW 1/16 S12 BT.

A 11" diameter Ponderosa Pine bears S 70° W, a distance of 20.92 feet marked SW 1/16 S12 BT.


I hereby certify that the corner was monumented on July 9, 1998.  
Witness: Norbert Volny, Jeff Madsen.

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Nick G. Robinson*

OREGON  
July 17, 1986  
RICK G. ROBINSON  
2219

Renewal Date December 31, 1998

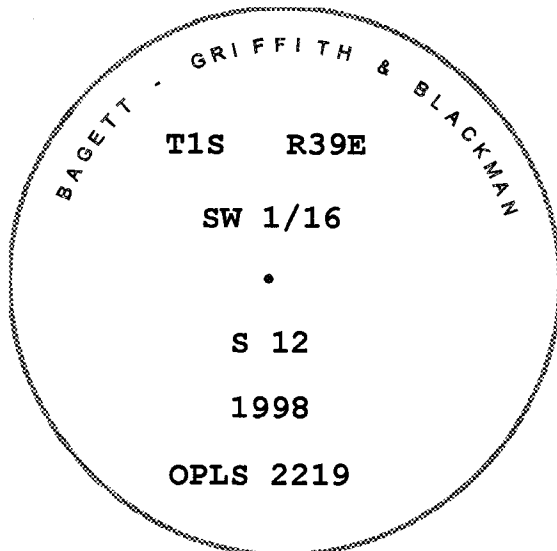

**UNION COUNTY  
SURVEYOR**

Date Received 7/20/98

Date Filed 7/24/98

Filed By *Hyun T. Han*

File Number 015-1998R

I used a steel tape and magnetic compass in the establishment of new accessories. The magnetic declination used was 17° East. The distance to the bearing trees is to a 50d spike driven on the right side of the tree at the root crown. I attached a brass washer marked OPLS 2219 to the BT blaze.