


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:
Corner not previously established.

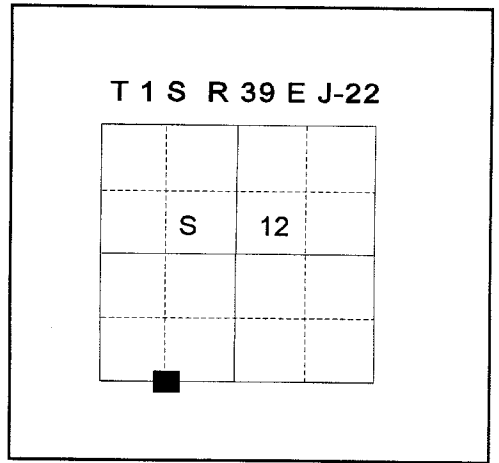

No record of monumentation found in UNION COUNTY survey records.

DESCRIPTION OF CORNER EVIDENCE FOUND:

Corner not previously established.

See Survey Number 022-1998.

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At the position determined by said survey, I set a 2 ½" diameter 30" long aluminum pipe with a 2 ½" aluminum cap marked as shown below, 6" in ground to bedrock, with a mound of stone 3' from base to top of cap, from which:

NEW BEARING TREES:

A 10" diameter Ponderosa Pine bears S 38° W, a distance of 35.42 feet marked W 1/16 S13 BT.

A 18" diameter Ponderosa Pine bears N 30° W, a distance of 52.16 feet marked W 1/16 S12 BT.

I hereby certify that the corner was monumented on July 8, 1998.
Witness: Norbert Volny, Jeff Madsen, Greg Engelgau.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Rick G. Robinson

OREGON
July 17, 1986
RICK G. ROBINSON
2219

Renewal Date December 31, 1998

BAGETT - GRIFFITH & BLACKMAN

T1S R39E

S 12

W 1/16

S 13

1998

OPLS 2219

**UNION COUNTY
SURVEYOR**

Date Received 07-20-98

Date Filed 7/24/98

Filed By *Greg Engelgau*

File Number 011-1998R

I used a steel tape and magnetic compass in the establishment of new accessories. The magnetic declination used was 17° East. The distance to the bearing trees is to a 50d spike driven on the right side of the tree at the root crown. I attached a brass washer marked OPLS 2219 to the BT blaze.