


UNION COUNTY SURVEYOR

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner originally monumented by David P. Thompson on GLO Contract number 103 dated September 3, 1863. Surveyor General record states: Set post for corner to secs 17,18,19&20 in mound of earth with pits, trench and charred stake as per instructions

T 1 S R 39 E N-05



Survey Number 62 recorded in Old Survey Book on pages 130-132 by J.W.Kimbrell states: 80.50 ch-Set stone 8x9x20 for corner to secs 17=18=19&20.

No record of subsequent monumentation found in UNION COUNTY survey records.

DESCRIPTION OF CORNER EVIDENCE FOUND:

No evidence of the original corner or it's accessories were found. Established the corner position at the proportionate distance, which falls in an existing North-South fenceline.

See Survey Number 037-2006.


DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At the position described above, I set a 2 1/2"x30" aluminum pipe with 2 1/2" aluminum cap marked as shown below, 28" in the ground, from which:


NEW BEARING OBJECTS:

- A 5/8"x30" iron pin with 1 1/2" aluminum cap marked "BGB SURVEY MARKER NE RP" bears N 2°50'44" E, a distance of 18.62 feet.
- A 5/8"x30" iron pin with 1 1/2" aluminum cap marked "BGB SURVEY MARKER SE RP" bears S 51°23'06" E, a distance of 11.30 feet.
- A 5/8"x30" iron pin with 1 1/2" aluminum cap marked "BGB SURVEY MARKER SW RP" bears S 4°28'07" W, a distance of 26.85 feet.
- A 5/8"x30" iron pin with 1 1/2" aluminum cap marked "BGB SURVEY MARKER NW RP" bears N 64°12'38" W, a distance of 6.58 feet.

I hereby certify that the corner was monumented on November 16, 2006. Witness: Jeff Hsu and Leo Castillo.

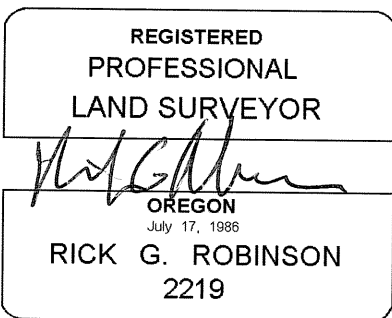

Renewal Date: December 31, 2008

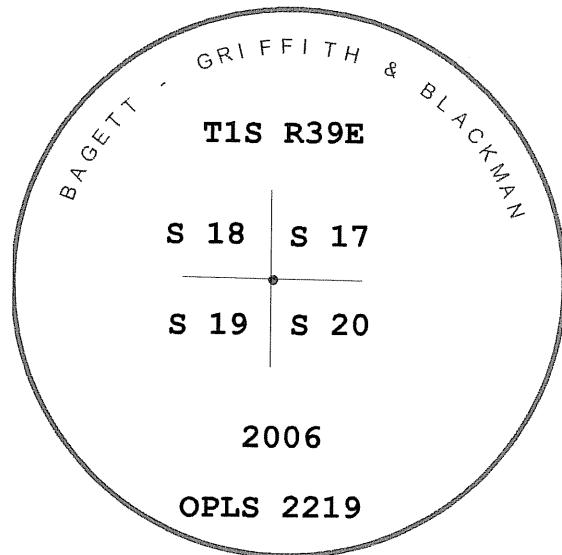

UNION COUNTY SURVEYOR

Date Received 12/30/06

Date Filed 4/14/06

Filed By Jeff T. Black

File Number 001-2007R

I used a Leica System 500 GPS unit in the establishment of new accessories. The basis of bearing is that of survey number 037-2006. The distance to the bearing objects is to the center of the aluminum cap.