


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**HISTORY OF ORIGINAL CORNER ESTABLISHED:**  
Corner not previously established

T 1 S R 39 E V-18




**DESCRIPTION OF CORNER EVIDENCE FOUND:**  
Fence post with K-tag marked 'Approx' bears 1.60 ft Northwesterly of true position determined by survey

SEE SURVEY NUMBER 029-2024  
**DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO MONUMENT THE ORIGINAL LOCATION OF THIS CORNER:**

At position determined by survey, I set a 5/8" x 30" iron pin, 29" in the ground, with a 2 1/2" aluminum cap marked as shown below and in a 1 ft diam. mound of stone, from which:

**NEW BEARING OBJECTS:**

A 6" Ponderosa Pine bears North 76° West, a dist. of 42.65 ft, marked W 1/16 S26 BT  
A 5" Douglas Fir bears North 6° West, a dist. of 37.35 ft, marked W 1/16 S26 BT.

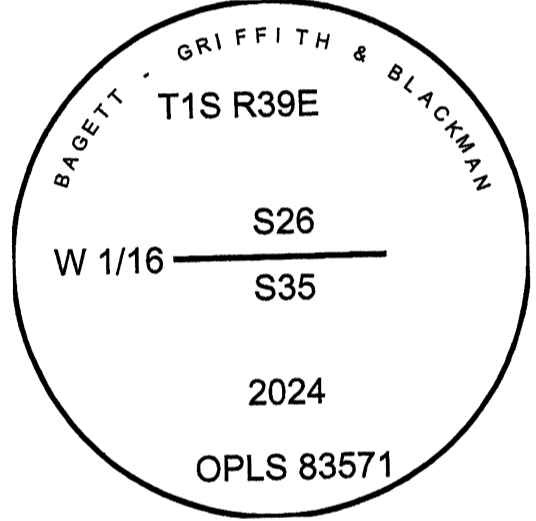

I hereby certify that the corner was monumented on August 12th, 2024.

Witnesses: Kyle Tucker, Adam Gordon

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR  
*[Signature]*  
OREGON  
June 2, 2010  
JEFFREY S. HSU  
83571

Renewal Date: June 30, 2025

I use a tape and compass in the establishment of the new bearing objects. 14° East was used for declination and measured to a brass washer labeled "OPLS 83571" in the BT blaze at the base of the tree. Distances are to a 60D nail in the right side of the base of the center of the tree.

UNION COUNTY  
SURVEYOR  
Date Received 8/19/24  
Date Filed 8/19/24  
Filed By *[Signature]*  
File Number 034-2024R