


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHED:

Corner originally established under GLO contract number 103 executed by David P. Thompson, dated September 3rd 1863. Surveyor General field notes state:

Set post for 1/4 sec corner in mound of earth with pits, trench charred stake as per instructions.

T 1 S R 39 E X-17



DESCRIPTION OF CORNER EVIDENCE FOUND:

Within 6 ft. of proportionate position I found a 2' diam. embedded mound of stone with steel fence post in center with BLM loc. tag marked "T1S R39E S34 E 1/4, Here, by transit and chain, JB SE, 8-74" upon excavation at location of fence post I find a 3" square hole loosely packed with dirt and roots (assumed hole from original post). Outside of the square hole is well packed earth surrounding it. Rock walls surround the 12" diam. hole excavated for the new monument. A North/South fence line bears approx. 30 ft. West, however fencing remnants exist to the South that were in line with found mound of stone.


SEE SURVEY NUMBER 029-2024

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO MONUMENT THE ORIGINAL LOCATION OF THIS CORNER:

At the center of the 3" square hole, I set a 2 1/2" aluminum cap, 30" in the ground, with 3" aluminum cap marked as shown below and in a 2' diam. collar of stone, from which:

NEW BEARING OBJECTS:

- A 5" diam. Ponderosa Pine bears North 77° East, a dist. of 53.15 ft., marked 1/4 S35 BT.
- A 6" diam. Ponderosa Pine bears South 19° East, a dist. of 166.05 ft., marked 1/4 S35 BT.
- A 4" diam. Ponderosa Pine bears South 35° West, a dist. of 21.80 ft., marked 1/4 S34 BT
- An 8" diam. Ponderosa Pine bears North 21° West, a dist. of 107.30 ft., marked 1/4 S34 BT

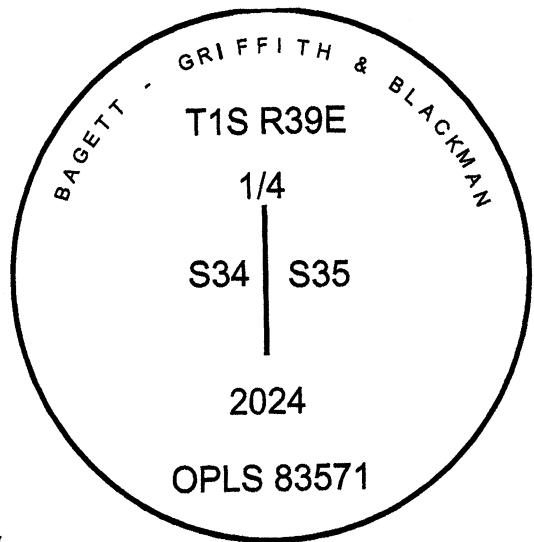

Set the found steel fencepost with original BLM tag approx. 0.5 ft. West

I hereby certify that the corner was monumented on July 16th, 2024.

Witnesses: Kyle Tucker

REGISTERED
PROFESSIONAL
LAND SURVEYOR
[Signature]
OREGON
June 2, 2010
JEFFREY S. HSU
83571

Renewal Date: June 30, 2025

I use a Leica GS18 with RTK for distance and compass for bearing in the establishment of the new bearing objects. 14° East was used for declination and measured to a brass washer labeled "OPLS 83571" in the BT blaze at the base of the tree. Distances are to a 60D nail in the right side of the base of the center of the tree.

UNION COUNTY
SURVEYOR
Date Received 8/19/24
Date Filed 8/19/24
Filed by *[Signature]*
File Number 035-2024R