


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**HISTORY OF ORIGINAL CORNER ESTABLISHED:**

Corner not previously established

T 1 S R 39 E Y-20



**DESCRIPTION OF CORNER EVIDENCE FOUND:**

Fence post with tag marked "Approx. Cor" bears South 72° West, approx 23 ft. from true corner position.


SEE SURVEY NUMBER 029-2024

**DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO MONUMENT THE ORIGINAL LOCATION OF THIS CORNER:**

At position determined by survey, I set a 5/8" x 30" iron pin, 26" in the ground, with a 2 1/2" aluminum cap, marked as shown below, in 1.5 ft. diam. mound of stone, from which:

**NEW BEARING OBJECTS:**

A 5" Ponderosa Pine bears North 70° East, a dist. of 15.25 ft, marked SE 1/16 S35 BT  
A 9" Ponderosa Pine bears North 4° West, a dist. of 39.75 ft, marked SE 1/16 S35 BT

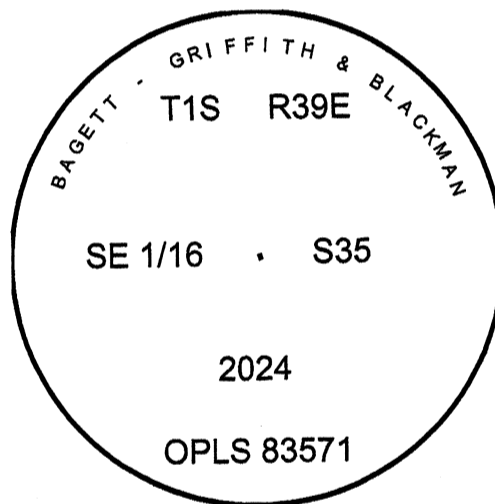

Set steel fencepost 1 ft. East

Approx. corner post with tag bears South 72° West, a distance of 23.00 ft.

I hereby certify that the corner was monumented on August 13th, 2024.

Witnesses: Kyle Tucker, Adam Gordon

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Jeffrey S. Hsu*  
OREGON  
June 2, 2010  
JEFFREY S. HSU  
83571

Renewal Date: June 30, 2025

I use a tape and compass in the establishment of the new bearing objects. 14° East was used for declination and measured to a brass washer labeled "OPLS 83571" in the BT blaze at the base of the tree. Distances are to a 60D nail in the right side of the base of the center of the tree.

UNION COUNTY  
SURVEYOR  
Date Received 8/19/24  
Date Filed 8/19/24  
Filed By *Jeffrey S. Hsu*  
File Number 059-2024R