

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


A-9

History of original corner establishment:

Corner established in 1882 by Henry Meldrum, Deputy Surveyor under contract No. 450.

Surveyor Genreal's records states:

Set a post, 4 ft. long, 4" sq., 24" in the ground, for closing cor. to secs. 4 and 5, mkd. T 1 S R 40 E CC on S, S 4 on E, and S 5 on W face with 4 notches on E and 2 notches on W edge from which

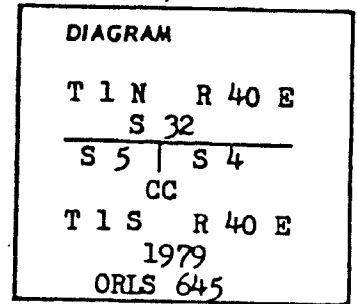

A 48" pine bears N 58 W, 12 lks. mkd. T 1 N S 32 CC BT.

A 7" fir bears N 72 E, 44 lks. mkd CC R 40 E S 33 BT.

A 30" fir bears S 18 W, 51 lks. mkd. T 1 S R 40 E S 5 CC BT.

Description of corner evidence found:

At assumed corner location I found 48" pine stump bears N 58 W, 12 lks. dist. Found face on tree but scribing not visible.

Found 30" fir stump bears S 18 W, 51 lks. dist. Found blaze in bark.

Found 28" fir alive bears N 72 E, 44 lks. Chopped out blaze and found scribing T 1 S S 4 visible but in poor condition.

I found a 5/8" rebar with cap SCA stamped on cap. This bears N 42 W, 1.70 ft. from actual corner.

Description of monument and accessories I established to perpetuate the original location of this corner

I set a 2" galv. iron pipe with brass cap 4" above surface of ground at location of original closing corner. Note: The true closing corner falls farther to the north of which I did not set. Cap stamped as shown above.

I set no new bearing trees.

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*James H. Hambleton*

OREGON  
JULY 10, 1964  
JAMES H. HAMBLETON  
645

Office of..... County of.....  
State of....., I hereby certify that the within instrument was filed in this office  
for record on the ..... day of.....  
..... by .....  
(COUNTY OFFICIAL) (DEPUTY)

<b>UNION COUNTY SURVEYOR</b>	
Date Received	_____
Date Filed	_____
GPO 796-333	
By	_____
File No.	<u>118-84 R</u>