


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner established in 1882 by Henry Meldrum, Deputy Surveyor under Contract 450.

Surveyor General's records states:

Set a basalt stone 16 x 10 x 5", 11" in the ground for closing corner to secs. 3 and 4, mkd. CC on S, with 3 notches on E and W edges; and raised a mound of stone alongside. Pits impracticable.

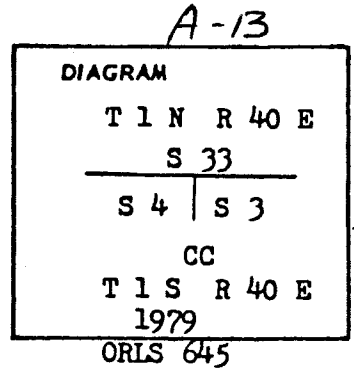

Description of corner evidence found:

At assumed corner location I found no trace of original corner as it falls in some farm land. Restored corner location using the GLO tie notes to the standard corner of secs. 33 & 34.

Description of monument and accessories I established to perpetuate the original location of this corner

I set a 2" galv. iron pipe with brass cap approx. 8" above surface of ground in a mound of stone 3 ft. dia. and 1 ft. high. Cap stamped as shown above.

No bearing trees available.

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*James H. Hambleton*

OREGON  
JULY 10, 1964  
JAMES H. HAMBLETON  
645

Office of..... County of.....  
State of....., I hereby certify that the within instrument was filed in this office  
for record on the ..... day of .....

..... by .....

(COUNTY OFFICIAL) (DEPUTY)

<b>UNION COUNTY SURVEYOR</b>	
Date Received	_____
Date Filed	_____
<small>± GPO 796-333</small>	
By	_____
File No.	<u>119-84 R</u>