

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

A-21

History of original corner establishment:

Corner established in 1882 by Henry Meldrum, Deputy Surveyor under Contract No. 450.


Surveyor General's records states:

Set a post 4 ft. long 4" sq. 24" in the ground for closing cor. to secs. 1 and 2, mkd. CC T 1 S R 40 E, on S, S 1 on E and S 2 on W, with 5 notches on W and 1 on E face; from which

A 36" pine bears N 4 W, 14 lks. mkd. T 1 N S 35 BT.

A 3 1/2" fir bears N 63 E, 15 lks. mkd. R 40 E S 35 BT.

A 3 1/2" tamarack bears S 27 E, 19 lks. mkd. T 1 S R 40 E S 1 BT.

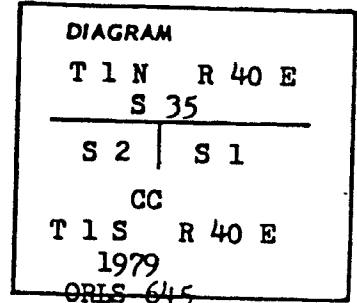

Description of corner evidence found:

At assumed corner location I found no evidence of wooden post.

Found approx. 36" pine stump bears N 4 W, 14 lks. with BT on face.

No evidence of other two bearing trees.

Description of monument and accessories I established to perpetuate the original location of this corner

I set a 2" galv. iron pipe with brass cap approx. 4" above surface of ground with four stones alongside as there are very few stone in the area. Cap stamped as shown above.

Bearing trees:

A 11" W. fir bears S 20 E, 20.25 ft. scribed T 1 S R 40 E S 1 BT.

A 11" W. fir bears S 85 W, 53.33 ft. scribed T 1 S R 40 E S 2 BT.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

James H. Hambleton

OREGON
JULY 10, 1964
JAMES H. HAMBLETON
645

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office
for record on the day of

..... by
(COUNTY OFFICIAL) (DEPUTY)

UNION COUNTY SURVEYOR	
Date Received	_____
Date Filed	_____
GPO 796-333	
By	_____
File No.	<u>124-84 R</u>