

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Index File No. A-01 ²⁵


History of original corner establishment:

Original corner established in 1882 by H. Meldrum under contract #450.

He set a post, 4 1/2"x4"x4", 24" in ground.

From which:

- A 6" Tamarack bears N48°E, 24 lks.
- A 3 1/2" Fir bears S26°W, 8 lks.
- A 3 1/2" Tamarack bears S61°E, 12 lks.



Note: A. Gesner resurveyed this line in 1898 under contract #683. He stated that he found the corner badly decayed and the NE BT was a fir instead of a Tamarack. The other trees had fallen down so he set a post 4'X4"X4" and marked:

- A 5" Fir bearing S46°E 22 lks.
- A 12" Tamarack bearing S34°45'W, 56 lks.

Description of corner evidence found:

Found a 3 1/2" BLM brass capped iron pipe stamped:

I stamped AM on the BLM brass cap.

T1N R40E
AM

Bearing trees found:

- An 11" Fir bears S5 1/2°W, 40.1 ft. scribing visible, T1SR40ES1CCBT.
- A 21" W. Larch, dead standing, bears S37°W, 37.1 ft. scribing visible: CCBLT1SR40ES1
- A 16" Fir bears S47°E, 71.9 ft., blaze healed.

S36

S1 S6
R40E R41E
CC T1S
1973

Note: The three bearing trees found reference the original CC location monumented by the BLM in 1973.

Description of monument and accessories I established to perpetuate the original location of this corner:

At the intersection point on the Base Line (N00°34'28"E, 8.69 ft. from the BLM brass cap), I Set:

A 2 1/2"X30" aluminum capped aluminum pipe stamped: Cap rises 6" above ground. Set steel fence post 3 ft. north of corner.

T1N R40E
S36
S1 | S6
R40E R41E
CC
T1S
RLS1848
1986

I referenced the following existing bearing trees:

- An 11" Fir bears S5°W, 48.8 ft., scribing visible T1SR40ES1CCBT
- A 16" Fir bears S42 1/4°E, 78.0 ft., blaze healed.


Painted blazes and attached signs as required in Specifications for Cadastral Surveys, USFS Region 6, March, 1982. A 3/4" brass disk stamped "LS1848 nailed to lower end of blazes.

Where Rd 6200 leaves creek bottom & starts to climb, a pvt rd Y's rt & follows Clark creek 1/4 mile and crosses south 200 ft. a gate on left, follow rd SE 300 ft, cor 20'Rt

Compass Declination: 19 1/2°E

Witness: Jeremy Sutton

I hereby certify that the above described corner monument and/or accessories was perpetuated as hereon described on Aug. 30, 1986.

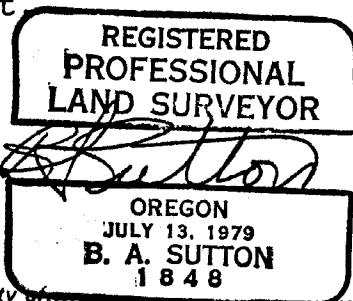

UNION COUNTY SURVEYOR	
Date Received	11-21-86
Date Filed	11-26-86
By	G. LANGLIZ, DEPUTY
File No.	270-86 R

Office of..... County of.....
 State of....., I hereby certify that the within instrument was filed in this office
 for record on the..... day of....., 19.....
 by.....
 (COUNTY OFFICIAL) (DEPUTY)