

UNION COUNTY SURVEYOR

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

None

DESCRIPTION OF CORNER EVIDENCE FOUND:

NONE

See Union County Survey 033-1998


DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At position determined by survey, I set a 2½" x 30" aluminum pipe with aluminum cap marked as shown below, 17" in the ground with a mound of stone 2 feet from base to top of cap from which:

- A 5/8" iron pin with 1/1/2" aluminum cap bears N65°E, a distance of 11.60 feet, marked BGB SURVEY MARKER NE RP.
- A 5/8" iron pin with 1/1/2" aluminum cap bears S45°E, a distance of 11.50 feet, marked BGB SURVEY MARKER SE RP.
- A 5/8" iron pin with 1/1/2" aluminum cap bears S64°W, a distance of 13.90 feet, marked BGB SURVEY MARKER SW RP.
- A 5/8" iron pin with 1/1/2" aluminum cap bears N36°W, a distance of 8.80 feet, marked BGB SURVEY MARKER NW RP.

I hereby certify that the corner was monumented on August 28, 1998.
Witness: Jeff Madsen, Norbert Volny, Greg Blackman Jr.

T 1 S R 40 E C-11

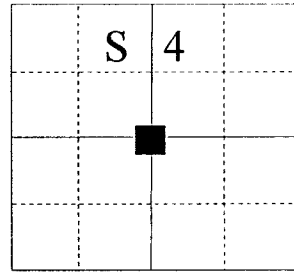


REGISTERED
PROFESSIONAL
LAND SURVEYOR

Rick G. Robinson

OREGON
July 17, 1986
RICK G. ROBINSON
2219

Renewal Date December 31, 1998

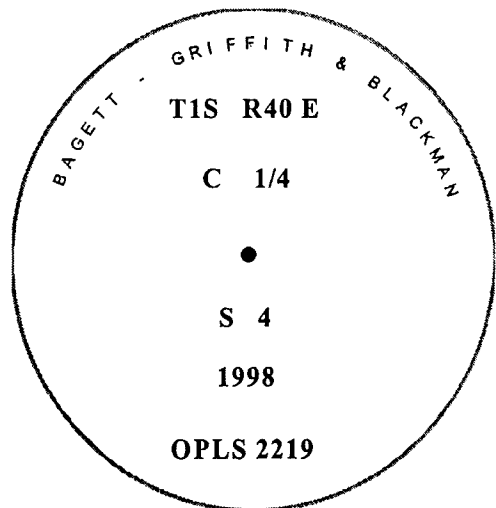

UNION COUNTY SURVEYOR

Date Received 9/2/98

Date Filed 9/26/98

Filed By *Greg T. Blackman*

File Number 069-1998R

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 18° East declination, the distances are to the center of the caps on the reference pins.