

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

C-13

History of original corner establishment:


Corner established in 1882 by Henry Meldrum, Deputy Surveyor under Contract No. 450.

Surveyor General's records states:

Set a post, 3 ft. long, 3" sq., 24" in the ground for  $\frac{1}{4}$  sec. cor., mkd.  $\frac{1}{4}$  S on W face; from which

A 18" pine bears N 50 E, 159 lks. mkd.  $\frac{1}{4}$  S BT.

A 15" pine bears N 61 W, 166 lks. mkd.  $\frac{1}{4}$  S BT.

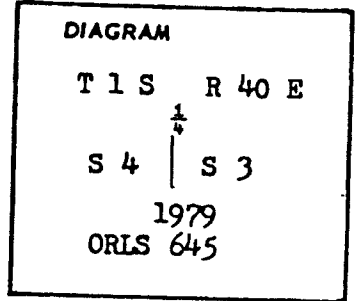

Description of corner evidence found:

At assumed corner location I found no evidence of wooden post.

Found alive 38" P. pine bears N 50 E, 159 lks.; face grown over though a portion of face is visible.

Found approx. 30" pine stump bears N 61 W, 166 lks. with BT visible on a face that has been chopped out.

Description of monument and accessories I established to perpetuate the original location of this corner.

I set a 2" galv. iron pipe with brass cap approx. 4" above the surface of the ground in a mound of stone 3 ft. dia. and 8" high. Cap stamped as shown above.

Set one new bearing tree:

A 11" P. pine bears N 28 W, 79.42 ft. scribed  $\frac{1}{4}$  S BT.

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*James H. Hambleton*

OREGON  
JULY 10, 1964  
JAMES H. HAMBLETON  
645

Office of..... County of.....  
State of....., I hereby certify that the within instrument was filed in this office  
for record on the..... day of.....  
..... by.....  
(COUNTY OFFICIAL) (DEPUTY)

<b>UNION COUNTY SURVEYOR</b>	
Date Received	_____
Date Filed	_____
By	_____
File No.	<u>128-84R</u>