


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

D-15

History of original corner establishment:

No previous history.

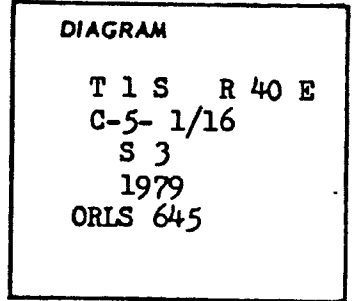

CORNER MARKING SHOULD READ: "C-S 1/16"
CONFIRMED VIA TELEPHONE WITH J. HAMBLETON
5-28-81 G. LANGLITZ, DEPUTY CO. SURVEYOR

Description of corner evidence found:

None

Description of monument and accessories established to perpetuate the original location of this corner

I set a 1" galv. iron pipe with brass cap 6" above the surface of the ground in a mound of stone 3 ft. dia. and 8" high. Cap stamped as shown above.

Bearing trees:

A 6" P. pine bears N 27 W, 75.42 ft. scribed 1/16 S BT.

A 19" P. pine bears E, 42.13 ft. scribed 1/16 S BT.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

James H. Hambleton

OREGON
JULY 10, 1964
JAMES H. HAMBLETON
645

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office
for record on the day of

(COUNTY OFFICIAL)

(DEPUTY)

UNION COUNTY SURVEYOR
Date Received _____
Date Filed _____ GPO 796-333
By _____
File No. <u>133-84 R</u>