

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHED:

Corner originally established by Henry Meldrum under GLO contract number 450 dated June 11th, 1882. Surveyor General field notes state:

Set basalt stone 16x10x4 ins., 11 ins. in ground for 1/4 section corner marked 1/4 on N face, from which:


A Pine 18 ins. diam bears S 37° E 90 lks dist. marked 1/4 S BT

A Pine 48 ins. diam bears N 72° W 161 lks dist. marked 1/4 S BT

In 1974 James Voelz set a 5/8" pin at proportion position as per Union County Survey 053-74.

In 2016 I found the pin in place as shown in Union County Partition Plat 20160020T.

T 1 S R 40 E E-03



DESCRIPTION OF CORNER EVIDENCE FOUND:

No original evidence found. Multiple stumps exist in the area but none matching record. Found a 5/8" iron pin approx. 5 ft. West of fence corner to North/South/West bearing fence lines.

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At the position of the found iron pin I add a 2 1/2" aluminum cap marked as shown below, 4" above ground and attached to the top of the iron pin, from which:

NEW BEARING OBJECTS:

An 8" Ponderosa Pine bears North 89° East a dist. of 12.30 ft., marked 1/4 S6 BT.

An 18" Ponderosa Pine bears South 70° East a dist. of 46.25 ft., marked 1/4 S7 BT.

A 14"x10"x8" (8" being above ground) basalt stone, firmly set, bears South 40° West a dist. of 23.45 ft., marked X BO.

A 21" Ponderosa Pine bears South 88° West a dist. of 109.90 ft., marked 1/4 S7 BT.

Trees in Northwest quadrant are slated to be logged according to landowner.

I hereby certify that the corner was perpetuated on April 20, 2020.

Witness: Kyle A. Tucker

REGISTERED
PROFESSIONAL
LAND SURVEYOR

[Signature]
OREGON
June 2, 2010
JEFFREY S. HSU
83571

Renewal Date: June 30, 2021


UNION COUNTY
SURVEYOR

Date Received 4/23/20

Date Filed 4/23/20

Filed By *[Signature]* DEPUTY

File Number 026-2020R

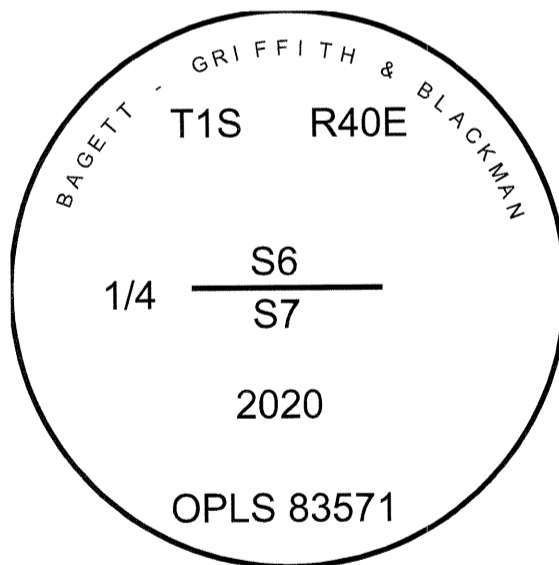

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 14° East declination, the distances are to a 60d spike driven into the right side of the root crown of the bearing trees. A brass washer marked OPLS 83571 is attached to the BT blaze of the new bearing trees. The distance and bearing to the stone are to the center of the "X".

HORIZONTAL CONTROL DATA

UNION COUNTY, OREGON

OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 2020029

1/4 SECTION CORNER COMMON TO SECTIONS 6 AND 7

TWP. 1 S RGE. 40 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: April 20, 2020

LAT: 45 ° 30 ' 0.93392 " N

SURVEYOR: JEFFREY S. HSU
OPLS 83571

LONG: 117 ° 51 ' 37.35965 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN
2006 ADAMS AVENUE
LAGRANDE, OR 97850
(541) 963-6092

SP. COOR: NAD 83(91)

N: 679536.794 INT FT.

E: 8878778.947 INT FT.

TYPE: GPS

THETA: 1 ° 52 ' 19.1 "

ORDER: SECOND CLASS: 1


SCALE FACTOR: 0.999911299

ELEV: 3106.23 US FT.

ELEV: DATUM: NGVD 29

COMMENTS:

5/8" iron pin with 2 1/2" aluminum cap
marked as shown



Renewal Date: June 30, 2021

1 METER = 3.2808333333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR (IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)