

**UNION COUNTY SURVEYOR**

**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**HISTORY OF ORIGINAL CORNER ESTABLISHMENT:**

Corner originally established by Henry Meldrum under GLO contract Number 450, dated December 1, 1882. Surveyor General record states: Set basalt stone 16x12x12, 11" in ground from which:

A Ponderosa Pine 20" dia. bears N38°E, 116 lks.

No record of subsequent monumentation found in Union County survey records.

**DESCRIPTION OF CORNER EVIDENCE FOUND:**

Found 39" pine in poor condition. The BT had a BLM tag on it, and was notched out so that scribing was exposed.

See Union County Survey 033-1998

**DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED**

**TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:**

At record bearing and distance from the found BT I set a 2½" x 30" aluminum pipe with aluminum cap marked as shown below, 23" in the ground, in a mound of stone 1' from base to top of cap from which:

A 21" Ponderosa Pine bears S75°E, a distance of 13.07 feet, marked T1S R40E S9 BT.


A 13" Ponderosa Pine bears S9°W, a distance of 46.25 feet, marked T1S R40E S8 BT.

An 18" Ponderosa Pine bears N70°W, a distance of 26.51 feet, marked T1S R40E S5 BT.

I hereby certify that the corner was monumented on August 19, 1998.

Witness: Jeff Madsen

T 1 S R 40 E -09

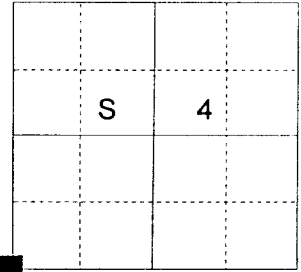


REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Rick G. Robinson*

OREGON  
July 17, 1986  
RICK G. ROBINSON  
2219

Renewal Date December 31, 1998

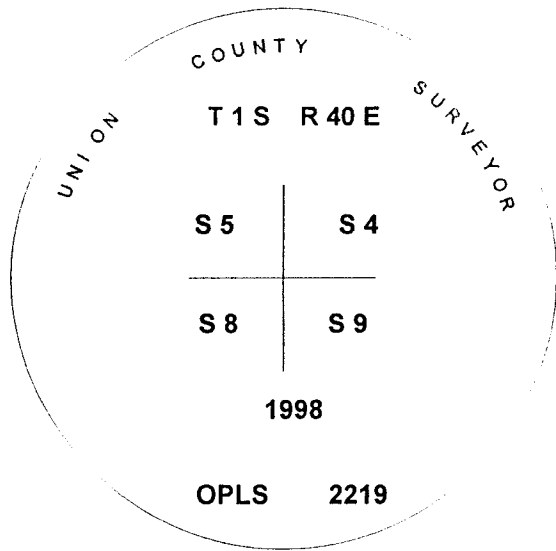

**UNION COUNTY SURVEYOR**

Date Received 8/25/98

Date Filed 9/26/98

Filed By *J. Gray*

File Number 066-1998R

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 18° East declination, the distances are to a 60d spike driven into the right side of the root crown of the bearing trees. A brass washer marked OPLS 2219 is attached to the BT blaze.