

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner established in 1882 by Henry Meldrum, Deputy Surveyor under Contract No. 450.


Surveyor General's records states:

Set a basalt stone 24 x 14 x 6", 18" in the ground for $\frac{1}{4}$ sec. cor., mkd. $\frac{1}{4}$ on N face; from which

A pine 48" dia. bears N 88 30 E, 360 lks. mkd $\frac{1}{4}$ S BT.

A 8" pine bears S 45 E, 29 lks. mkd. $\frac{1}{4}$ S BT.

E-15

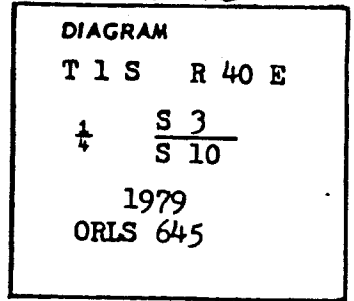

Description of corner evidence found:

At assumed corner location I found no trace of stone.

Found approx. 50" P. pine stump badly rotted bears N 88 30 E, 360 lks. Confirmed tree and corner location by tying to adjacent sec. corners.

No other evidence available as corner falls in old field or prairie land.

Description of monument and accessories I established to perpetuate the original location of this corner

I set a 2" galv. iron pipe with brass cap approx. 12" above surface of ground in a mound of stone 3 ft. dia. and 1 $\frac{1}{2}$ ft. high. Cap stamped as shown above.

No bearing trees within reach.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

James H. Hambleton

OREGON
JULY 10, 1964
JAMES H. HAMBLETON
645

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office
for record on the day of.....
..... by
(COUNTY OFFICIAL) (DEPUTY)

UNION COUNTY SURVEYOR	
Date Received	_____
Date Filed	_____
By	_____
File No.	136-84 R