

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

E-21


History of original corner establishment:

Corner established in 1882 by Henry Meldrum, Deputy Surveyor under Contract No. 450.

Surveyor General's records state:

Set basalt stone 18 x 12 x 6", 12" in the ground for cor. to secs. 1, 2, 11 & 12, mkd. with 5 notches on S and 1 notch on E edge and raised a small mound of stone alongside, in small open glade; pits impracticable, from which

A 40" pine bears N 42 E, 111 lks. mkd. T 1 S R-40 E S 1 BT.

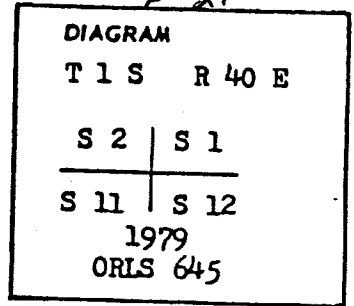

Description of corner evidence found:

At assumed corner location I found a charred pine stump approx. 50" dia. which bears N 42 E, 111 lks.

No sign of stone.

Description of monument and accessories I established to perpetuate the original location of this corner

I set a 2" galv. iron pipe with brass cap 12" above surface of ground in a mound of stone 3 ft. dia. and 1 ft. high. Cap stamped as shown above.

Set four bearing trees:

A 10" pine bears N 59 E, 56.95 ft. scribed T 1 S R 40 E S 1 BT.

A 10" pine bears N 31 W, 65.10 ft. scribed T 1 S R 40 E S 2 BT.

A 8" pine bears S 53 W, 32.8 ft. scribed T 1 S R 40 E S 11 BT.

A 9" pine bears S 74 E, 44.0 ft. scribed T 1 S R 40 E S 12 BT.

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*James H. Hambleton*

OREGON  
JULY 16, 1964  
JAMES H. HAMBLETON  
645

Office of..... County of.....  
State of....., I hereby certify that the within instrument was filed in this office  
for record on the ..... day of.....  
..... by .....  
(COUNTY OFFICIAL) (DEPUTY)

<b>UNION COUNTY SURVEYOR</b>	
Date Received	_____
Date Filed	_____
By	_____
File No.	144-84 R