


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**HISTORY OF ORIGINAL CORNER ESTABLISHED:**

Corner originally established by Henry Meldrum under GLO contract number 450 dated June 11th, 1882. Surveyor General field notes state:  
Set basalt stone 36x24x10 ins., 27 ins. in ground for 1/4 sec. cor. marked 1/4 on W. face and raised a mound of stone alongside. Pits impracticable.

In 1974 James Voelz finds the stone. Union County Survey Record 53-74 states "Found Stone".

T 1 S R 40 E G-05



**DESCRIPTION OF CORNER EVIDENCE FOUND:**

Found a 5/8"x30" iron pin lying loosely in Northwest corner of rock jack fence corner to N/E/S/W bearing fence lines. The majority of the rock in the area has been disturbed and I find no chiseled stone of called size. Due to harmony of the fence corner position I accept this corner as the best available evidence of the original corner position.


SEE SURVEY NUMBER 026-2022

**DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO MONUMENT THE ORIGINAL LOCATION OF THIS CORNER:**

At the position of the intersecting fence lines, also being the Northwest corner of the rock jack, I set a 5/8" x 30" iron pin, 15" in the ground to bedrock, with 2 1/2" aluminum cap marked as shown, from which:

**NEW BEARING OBJECTS:**

- A 4'x3'x1' stone bears North 41°31' East, a dist. of 16.36 ft., chiseled X BO.
- A 16" Ponderosa Pine bears South 29° East, a dist. of 59.60 ft., marked 1/4 S8 BT.
- A stone outcrop, 2'x2' being exposed, bears South 53°14' West, a dist. of 16.93 ft., chiseled X BO.
- A stone outcrop, 2 1/2'x2' being exposed, bears North 46°15' West, a dist. of 10.80 ft., chiseled X BO.

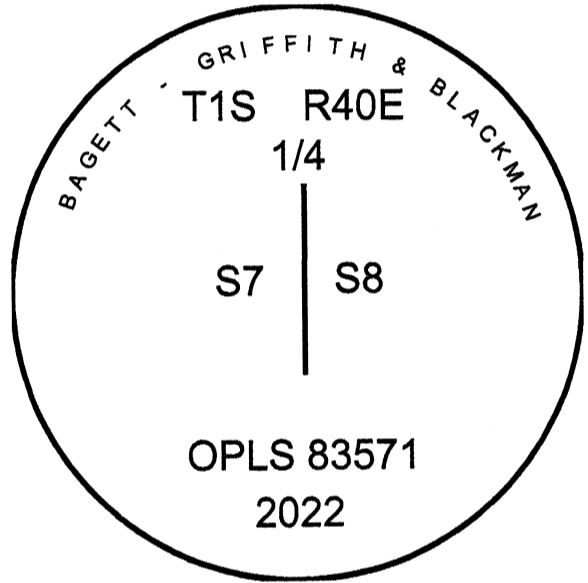

I hereby certify that the corner was monumented on August 23, 2022.  
Witness: Dan S. Drum

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR




OREGON  
June 2, 2010  
JEFFREY S. HSU  
83571

Renewal Date: June 30, 2023

**UNION COUNTY  
SURVEYOR**

Date Received 8/31/22

Date Filed 8/31/22

Filed By 

File Number 025-2022R

I used a steel tape and magnetic compass in the establishment of the bearing tree. I used 14° East declination, the distance is to a 60d spike driven into the right side of the root crown of the bearing tree. A brass washer marked OPLS 83571 is attached to the BT blaze of the new bearing tree. I used a Leica GS18 with RTK in the establishment of the other new accessories. Basis of Bearing is as per Survey Number 026-2022. The distances and bearings are to the center of the chiseled X.