

UNION COUNTY SURVEYOR

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner originally established by Henry Meldrum under GLO contract Number 450, dated December 1, 1882. Surveyor General record states:

Set basalt stone 14x9x6, 10" in ground marked 1/4 on West face from which:

- A Ponderosa Pine 36" dia. bears N39°W, 103 lks.
- A Ponderosa Pine 36" dia. bears N17°E, 114 lks.

No record of subsequent monumentation found in Union County survey records.

DESCRIPTION OF CORNER EVIDENCE FOUND:
NONE

See Union County Survey 039-1998


DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At position determined by survey, I set a 2½" x 30" aluminum pipe with aluminum cap marked as shown below, 20" in the ground with a mound of stone one foot base to top of cap from which:

- A 16 inch Ponderosa Pine bears N19°E, a distance of 40.18 feet, marked 1/4 S9 BT.
- A 8 inch Ponderosa Pine bears S48°E, a distance of 190.90 feet, marked X BT.
- A 10 inch Douglas Fir bears S82°W, a distance of 34.64 feet, marked X BT.
- A 10 inch Douglas Fir bears N31°W, a distance of 64.97 feet, marked 1/4 S8 BT.

I hereby certify that the corner was monumented on October 2, 1998.
Witness: Norbert Volny, Greg Blackman Jr.

T 1 S R 40 E G-09

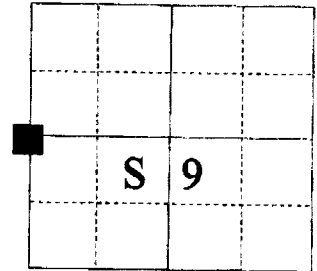


REGISTERED
PROFESSIONAL
LAND SURVEYOR

Rick G. Robinson

OREGON
July 17, 1986
RICK G. ROBINSON
2219

Renewal Date December 31, 1998

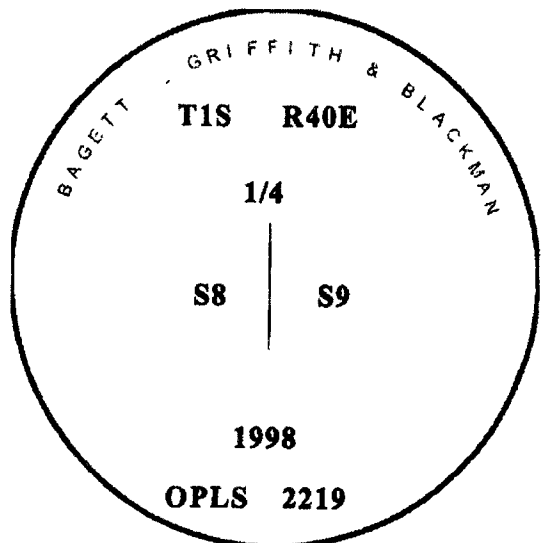

UNION COUNTY SURVEYOR

Date Received 10/7/98

Date Filed 10/9/98

Filed By *Greg Blackman*

File Number 081-1998R

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 18° East declination, the distances are to a 60d spike driven into the root crown of the bearing tree. A brass washer marked OPLS 2219 is attached to the BT blaze.