

**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**History of original corner establishment:**

Corner originally established by Timothy W. Davenport under GLO contract Number 102, dated July 20, 1863. Surveyor General record states: Set post from which:

- A Pine 24" dia. bears S31°W, 93 lks.
- A Pine 48" dia. bears S78°E, 112 lks.
- A Pine 40" dia. bears N65°E, 125 lks.

No record of subsequent monumentation found in Union County survey records.

**Description of corner evidence found:**

None


See Union County Survey 025-1996

**Description of monument and accessories I established to perpetuate the original location of this corner:**

At position determined by survey I set a 2½" x 30" aluminum pipe with 2½" aluminum cap marked as shown below, 28" in the ground, from which:

- A 5/8" x 30" rebar bears N34°E, 10.22 feet, with 1 1/2" aluminum cap marked BGB SURVEY MARKER NE RP.
- A 5/8" x 30" rebar bears S52°E, 10.53 feet, with 1 1/2" aluminum cap marked BGB SURVEY MARKER SE RP.
- A 5/8" x 30" rebar bears S34°W, 11.03 feet, with 1 1/2" aluminum cap marked BGB SURVEY MARKER SW RP.
- A 5/8" x 30" rebar bears N65°W, 12.57 feet, with 1 1/2" aluminum cap marked BGB SURVEY MARKER NW RP.

I hereby certify that the corner was monumented on July 18, 1996.  
Witness: Mark Durbin, Jeff Madsen, Travis Foster

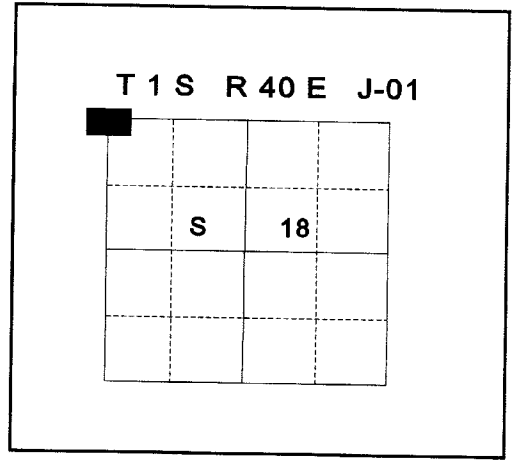


REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Jeffery P. Petersen*

OREGON  
JULY 20, 1993  
**JEFFERY P. PETERSEN**  
2625

*Renewal Date: December, 31 1996*

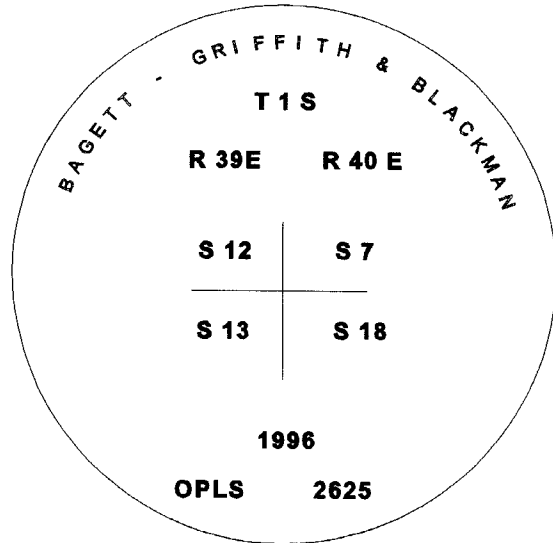

**UNION COUNTY  
SURVEYOR**

Date Received 7-30-96

Date Filed 7-31-96

Filed By P. ROBINSON, Deputy

File Number 027-1996R

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 18° East declination, the distances are to the center of the caps on the reference pins.