


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

None

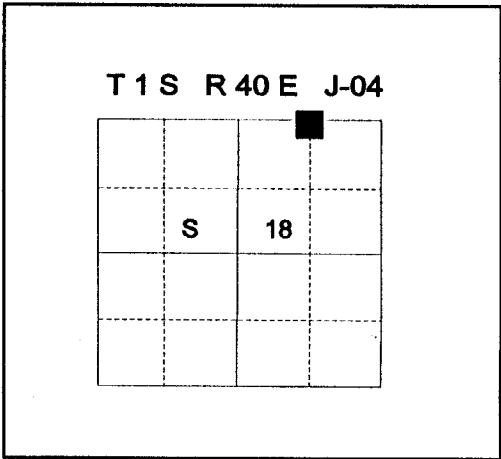

No record of subsequent monumentation found in Union County survey records.

DESCRIPTION OF CORNER EVIDENCE FOUND:

None

See Union County Survey 034-1996

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At the proportioned position I set a 2½" x 30" aluminum pipe with 2½" aluminum cap marked as shown below, 28" in the ground with ring of stone, from which:

NEW BEARING TREES:

- A 8" Ponderosa Pine bears S54°W, 97.32 feet, marked E 1/16 S18 BT.
- A 10" Ponderosa Pine bears N9°W, 45.49 feet, marked E 1/16 S7 BT.

I hereby certify that the corner was monumented on August 12, 1996.

Witness: Mark Durbin, Jeff Madsen

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Jeffery P. Petersen

OREGON
JULY 20, 1993

JEFFERY P. PETERSEN
2625

Renewal Date: December, 31 1996

BAGETT - GRIFFITH & BLACKMAN

T 1 S R 40 E

S 7

E 1/16 ————— S 18

1996

OPLS 2625

**UNION COUNTY
SURVEYOR**

Date Received 8-15-96

Date Filed 8-15-96

Filed By R. Robinson, Deary

File Number 089-1996

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 18° East declination, the distances are to a 60d spike driven into the right side of the root crown of the bearing trees. Attached brass washer marked OPLS 2625 to the BT blaze.