

**UNION COUNTY SURVEYOR**

**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**


**HISTORY OF ORIGINAL CORNER ESTABLISHMENT:**

Corner originally established by Henry Meldrum under GLO contract Number 450, dated December 1, 1882. Surveyor General record states:

Set post 4' by 4" ins sq. 24" in ground... from which:

- A Pine 36" dia. bears N37°E, 152 lks.
- A Pine 15" dia. bears N78°W, 42 lks.
- A Pine 24" dia. bears S70°W, 49 lks.
- A Pine 18" dia. bears S60°E, 53 lks.

T 1 S R 40 E J - 09



No record of subsequent monumentation found in Union County survey records.

**DESCRIPTION OF CORNER EVIDENCE FOUND:**  
NONE

See Union County Survey 039-1998

**DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:**

At position determined by survey, I set a 2½" x 30" aluminum pipe with aluminum cap marked as shown below, 24" in the ground from which:

- A 13 inch Douglas Fir bears N32°E, a distance of 105.55 feet, marked T1S R40E S9 BT.
- A 6 inch Ponderosa Pine bears S26°E, a distance of 46.33 feet, marked S16 T1S R40E BT.
- A 16 inch Ponderosa Pine bears S46°W, a distance of 59.39 feet, marked S17 T1S R40E BT.
- A 14 inch Douglas Fir bears N57°W, a distance of 86.89 feet, marked S8 T1S R40E BT.


I hereby certify that the corner was monumented on October 2, 1998.  
Witness: Norbert Volny, Greg Blackman Jr.

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Rick G. Robinson*

OREGON  
July 17, 1985  
RICK G. ROBINSON  
2219

Renewal Date December 31, 1998

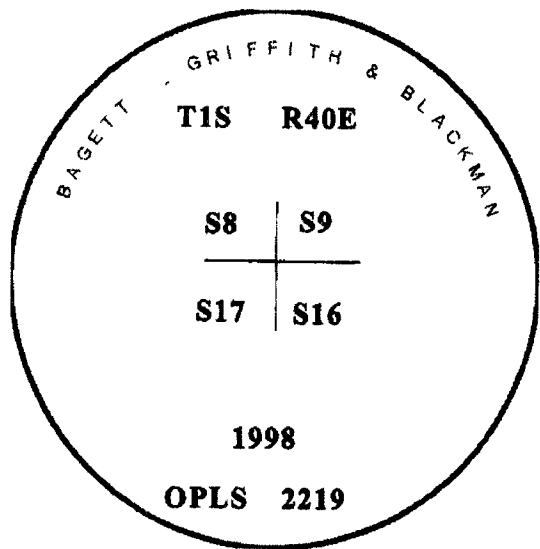

**UNION COUNTY SURVEYOR**

Date Received 10/7/98

Date Filed 10/9/98

Filed By *Greg Blackman Jr.*

File Number 079-1998R

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 18° East declination, the distances are to a 60d spike driven into the root crown of the bearing tree. A brass washer marked OPLS 2219 is attached to the BT blaze.