


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

J-21

History of original corner establishment:

Corner established in 1882 by Henry Meldrum, Deputy Surveyor under Contract No. 450.

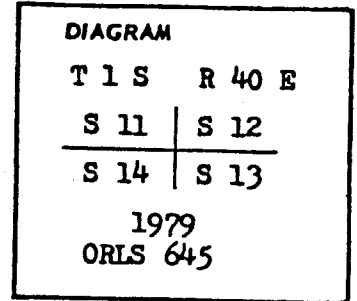

Surveyor General's records state:
Set post, 4 ft. long, 4" sq., 24" in the ground for cor. to secs. 11, 12, 13 & 14 mkd. T 1 S S 12 on NE, R 40 E S 11 on NW, S 14 on SW, and S 13 on SE, with 4 notches on S and 1 notch on E edge from which:

A 7" pine bears N 47 E, 75 lks. mkd. T 1 S R 40 E S 12 BT.

A 9" pine bears N 24 W, 42 lks. mkd. T 1 S S 11 BT.

A 15" pine bears S 72 W, 41 lks. mkd. S 14 BT.

A 20" pine bears S 35 E, 75 lks. mkd. S 13 BT.

Description of corner evidence found:

At assumed corner location I found no trace of the wooden post.

Found a stump hole bears S 72 W, 41 lks.

Found a 28" pine stump bears S 35 E, 75 lks. with face and scribing visible 40 E S 13 BT.

No trace of other two trees in sec. 11 & 12.

Description of monument and accessories I established to perpetuate the original location of this corner

I set a 2" galv. iron pipe with brass cap 12" above surface of ground as to rocky to bury any deeper. Placed a mound of stone 3 ft. dia. and 1 ft. high about the monument. Cap stamped as shown above.

New bearing trees:

A 5" larch bears N 40 W, 18.05 ft. scribed T 1 S R 40 E S 11 BT.

A 7" larch bears N 82 E, 17.20 ft. scribed T 1 S R 40 E S 12 BT.

A 8" D. fir bears S 46 E, 15.20 ft. scribed T 1 S R 40 E S 13 BT.

A 6" P. pine bears S 23 W, 25.8 ft. scribed T 1 S R 40 E S 14 BT.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

James H. Hambleton

OREGON
JULY 10, 1964
JAMES H. HAMBLETON
645

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office
for record on the day of

..... by

(COUNTY OFFICIAL) (DEPUTY)

UNION COUNTY SURVEYOR	
Date Received	_____
Date Filed	_____
GPO 796-333	
By	_____
File No.	170-84R